

GREENLED
INDUSTRY

CATALOGUE 2016

For further information:
www.greenledindustry.com
Data subject to change
Printed in 2016

GREENLED INDUSTRY AN ITALIAN SUCCESS STORY



Has its origins in a research project carried out by the company TSI Srl that develops innovative LED luminaires. The heart of this appliance "beats" in a different way and allows to a well-established lighting system to achieve excellent performances.

The TSI research project has soon turned into a real industrial project, the small research company was taken over by Business Italeaf Spa, the holding company listed on the Nasdaq on the Stockholm exchange that is now holding the majority stake of Terni Energia SpA, a leader in the sector of energy in Italy.

In 2012, from JV, the fusion of TSI and Italeaf gave birth to Greenled Srl that, thanks to the financial resources of Italeaf SpA, received the capital required for the development of its first product. Now, that innovative beating heart is surrounded by further lighting technologies able to guarantee duration and operation in extreme conditions.

In 2013, the company was pushed further by changing its face with new industrial products under the brand Greenled Industry SpA. They can be applied in the most extreme conditions: steelworks and glassworks, thus showing that real performances can even exceed the laboratory ones.



From then on, a series of successes followed one another: thanks to an internationalization process, the company of Italeaf has opened its international sites in London and Hong Kong and maintained its productive factory in the Green Heart of Italy. Greenled Industry, a well-established company on the national and European market, has recently opened a new production plant in Novara, with the development of product lines known as Office, Commercial and Torri Faro.

Thanks to the acquisition of new know-how, continuous research and development of new technologies, today the product range offered by Greenled Industry is able to meet all the lighting needs of industries and the service sector, thus achieving a leading position in the most extreme applications of the LED technology.



PRODUCTS INDEX



INDUSTRIAL

Pag 14



TOWERLIGHT

Pag 26



STREET & URBAN

Pag 32



COMMERCIAL & OFFICE

Pag 40

VOLTA
MATTEUCCI
B-BLOCK
DA VINCI



SPARTA




LÙMINO
URBAN RELAMPING KIT



SATURN
MERCURY
GEMINI
iPANEL



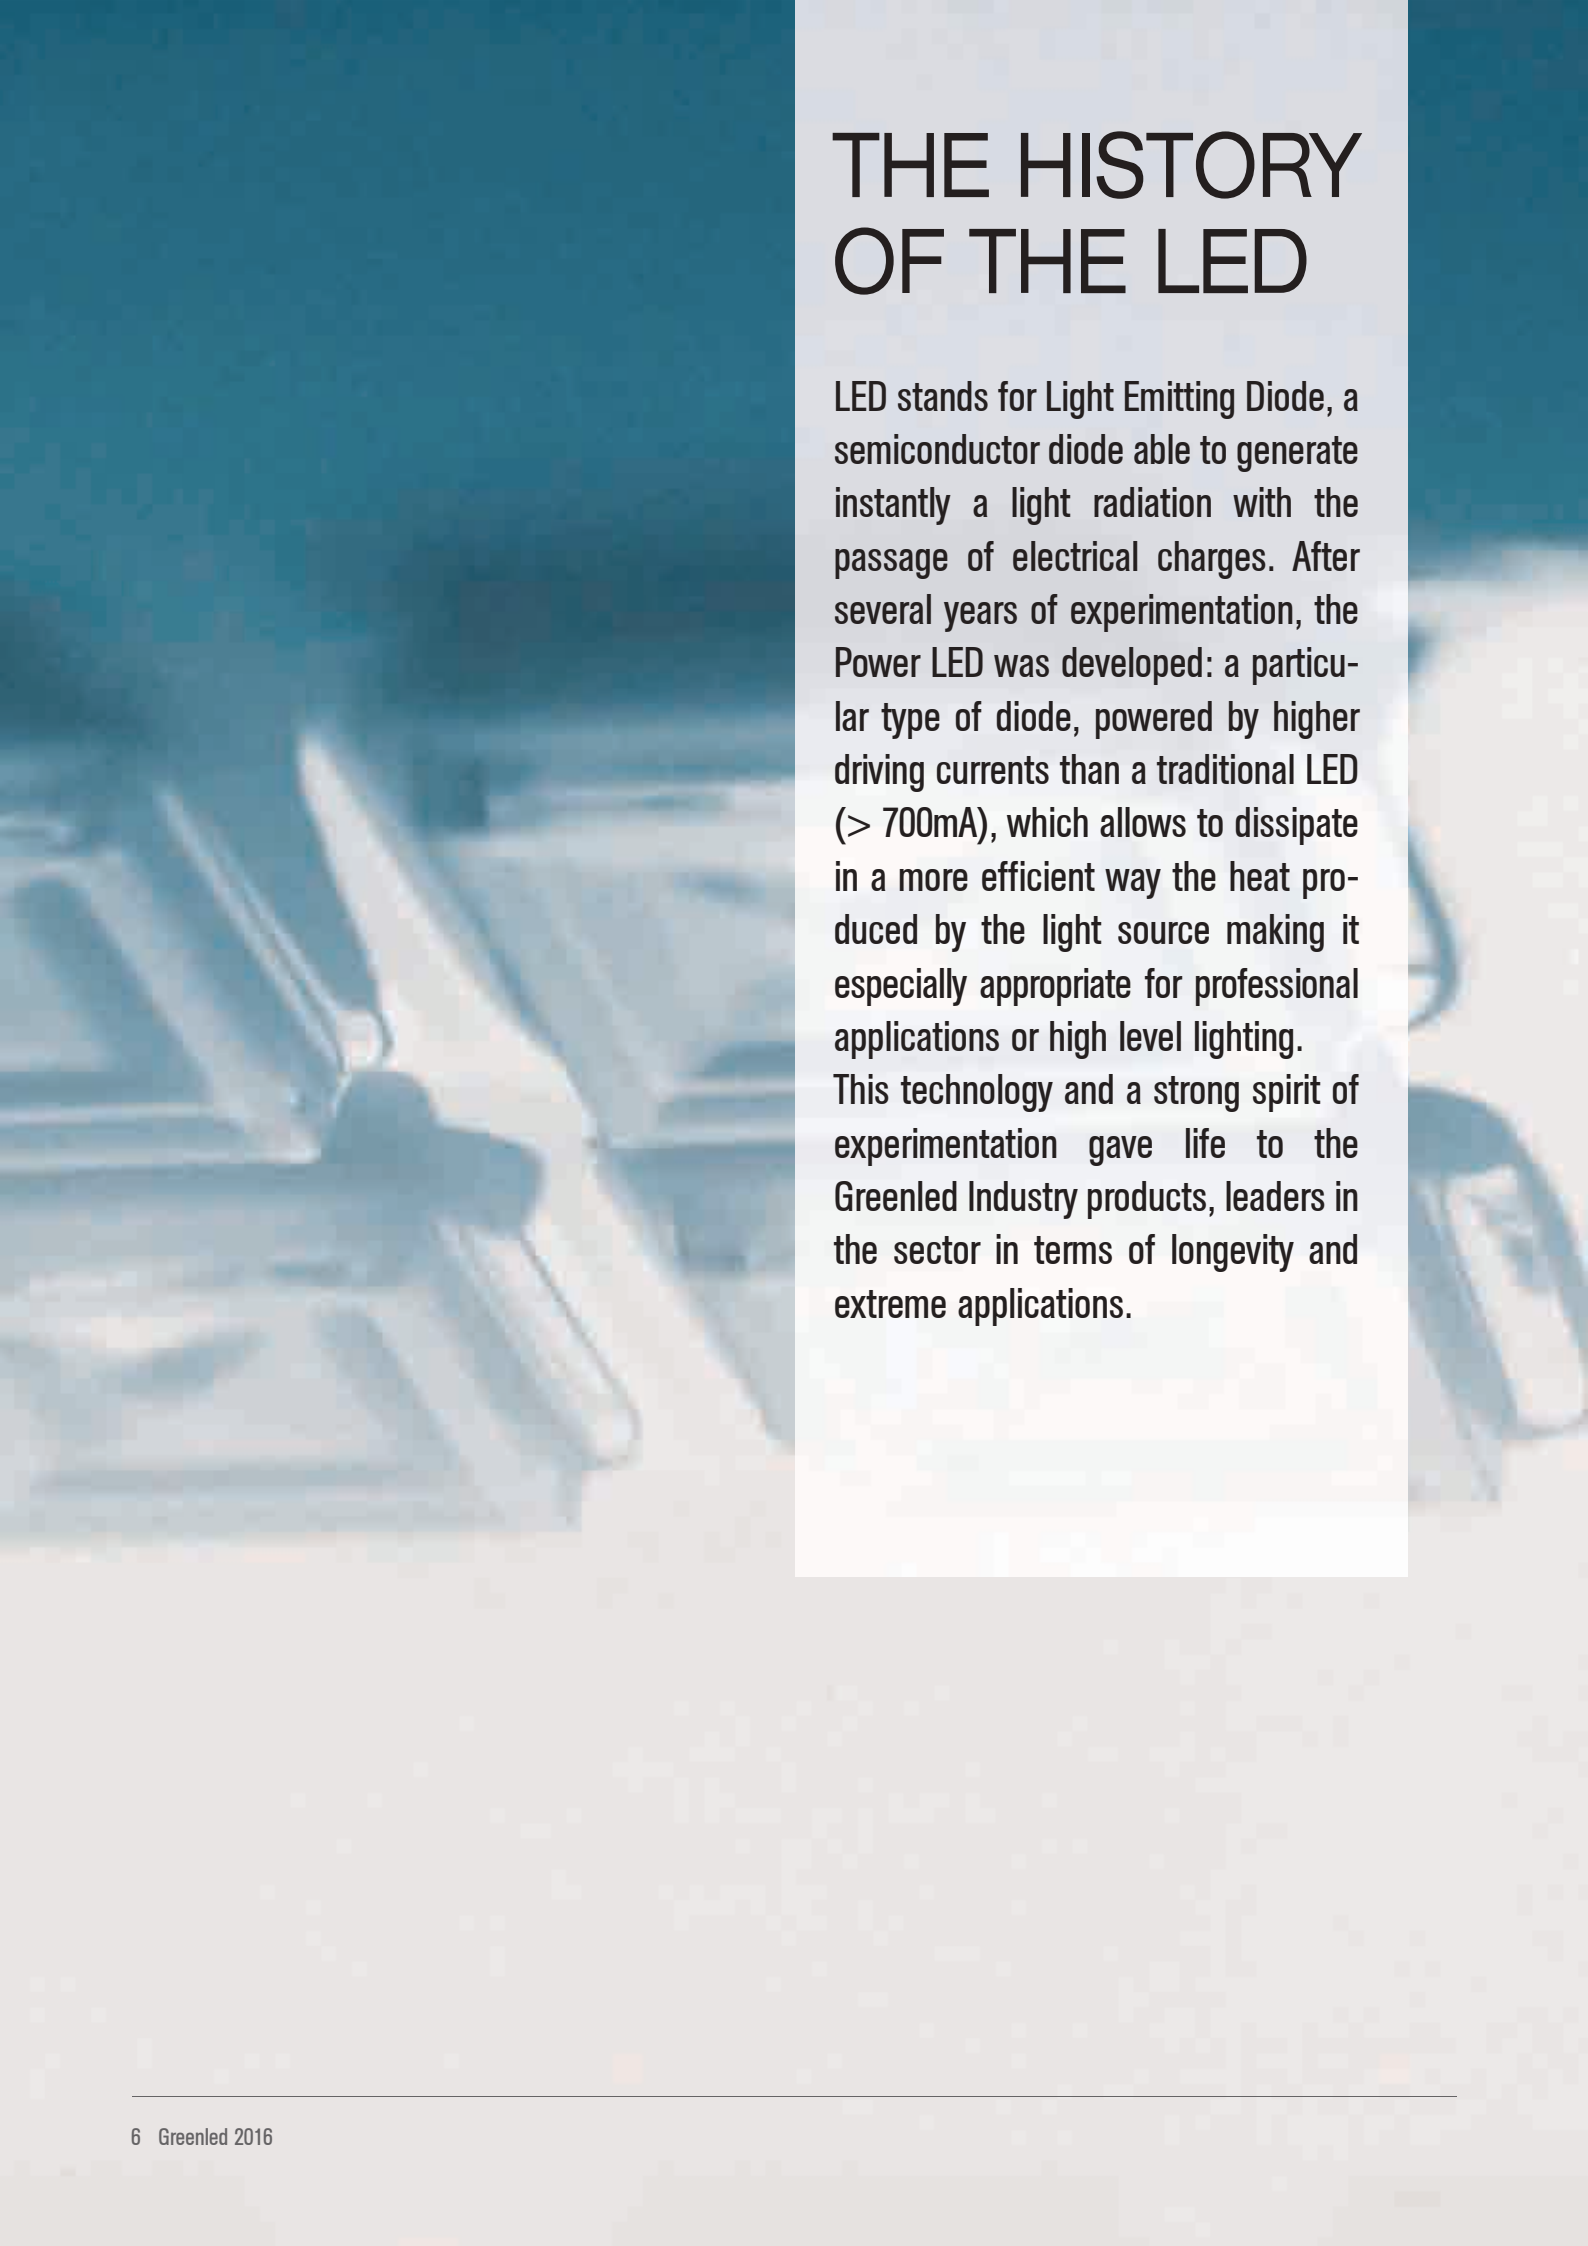

THE HISTORY OF THE LED

LED stands for Light Emitting Diode, a semiconductor diode able to generate instantly a light radiation with the passage of electrical charges. After several years of experimentation, the Power LED was developed: a particular type of diode, powered by higher driving currents than a traditional LED ($> 700\text{mA}$), which allows to dissipate in a more efficient way the heat produced by the light source making it especially appropriate for professional applications or high level lighting.

This technology and a strong spirit of experimentation gave life to the Greenled Industry products, leaders in the sector in terms of longevity and extreme applications.



HOW TO CHOOSE A LED LUMINAIRE?

LUMINOUS EFFICIENCY (Lm/W)

The REAL light output compared to the energy consumed is the first assessment parameter for a luminaire. The plate data are in fact less important than the real consumption measured as a function of the yield of lumens.

OPERATING TEMPERATURE RANGE

Many LED luminaires stop working in extreme working conditions, such as high or low temperatures. It is in these very conditions that the use of heat-sinks and the driving currents of the power supplies start to make a difference.

ENERGY CONSUMPTION DURING THE SERVICE LIFE


The real system luminous efficiency, together with the service life of the lamp, are the real values that you buy when you choose a LED luminaire. The economic benefit can be easily calculated by multiplying the savings obtained from every hour of power on, compared to the traditional technology, for the useful life of the luminaire itself.

WARRANTY

Today, all producers of LED luminaires like to say that their luminaires have a lumen maintenance equal to 50,000 hours. Yet, how many of them can achieve 150,000?

As a matter of fact, this is the main parameter to be taken into account when choosing a new lighting system, otherwise that will only be true theoretically.

CERTIFICATIONS



CERTIFICATION UNI EN ISO 9001:2008 "Quality Management Systems"

CEI EN 62471 Photo-biological safety for lamps and lamp systems

CEI EN 55015 Limits and Methods of Measurement of Radio Interference Characteristics of Information Technology Equipment and of similar equipment

CEI EN 61000-3-2 Electromagnetic compatibility (EMC) – Part 3-2 Limits – Limits for harmonic current emissions (input current equipment $\leq 16A$ per phase)

CEI EN 61000-3-3 Electromagnetic compatibility (EMC) – Part 3-3: Limits – Limits for voltage variations, voltage fluctuations and of the flicker in low-voltage supply systems for equipment with rated current $\leq 16A$ per phase and not subject to conditional connection

CEI EN 61000-4-2 Electromagnetic compatibility (EMC) Part 4-2: Testing and measurement techniques - Immunity tests with discharges of static electricity

CEI EN 61000-4-3 Electromagnetic compatibility(EMC) – Part 4-3: Testing and measurement techniques – Test of immunity to electromagnetic fields to electromagnetic radiation

CEI EN 61000-4-4 Electromagnetic compatibility(EMC) – Part 4 - 4: Testing and measurement techniques – Test of immunity to transients/ fast electrical pulses

CEI EN 61000-4-5 Electromagnetic compatibility (EMC) – Part 4-5: Testing and measurement techniques – Test of immunity to pulse

CEI EN 61000-4-6 Electromagnetic compatibility (EMC) Part 4-6: Testing and measurement techniques – Immunity to disturbances conducted, induced by radiofrequency fields

CEI EN 61000-4-11 Electromagnetic compatibility (EMC) – Part 4-11: Testing and measurement techniques – Tests of immunity to voltage dips, short interruptions and voltage variations

CEI EN 61547 Equipment for general lighting purposes – EMC Immunity prescriptions

CEI EN 60598-1 Lighting equipment – Part 1: General prescriptions and tests

CEI EN 60598-2-3 Lighting equipment – Part 2-3: Special prescriptions – Road lighting equipment

CEI EN 60598-2-3/EC Lighting equipment– Part 2-3: Special prescriptions– Lighting equipment

CEI EN 62031 LED modules for general lighting purposes – Safety specifications

CEI EN 61347-2-13 Lamp control gear. Part 2-13: Special prescriptions for electronic supply units supplied by direct or alternating current for LED modules

CEI EN 60529 Degrees of protection provided by enclosures (IP code)

UNI EN 13032-1:2012 Light and lighting solutions– Measurement and presentation of photometric data of lamps and luminaires – Part 1: Measurement and file format

Directive 2004/108/CE DIRECTIVE 2004/108/CE OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of February 11th 2004 regarding the approximation of the laws of the Member States, related to the electromagnetic compatibility and repealing directive 89/336/CEE.



"THE LED FACTORY THAT YOU CAN VISIT WITHOUT TAKING A FLIGHT"

Letter from the President

Dear Customer,

the catalogue you are about to read is not just a conventional technical and institutional catalogue to which you have been quite probably used so far. We have been presenting you our company, our history, a brief overview of the LED world and our quality certifications, which is all quite normal, let me say, or even trivial.

What you are going to see now are instead our FLAGSHIPS, the way we make a difference on the market, the best possible use that we can make and the added value we can bring to our customers and their companies. From this page on, you can understand what buying a Greenled Industry product means, not just any LED ceiling light.

Besides the technical features of our products and services useful to your work described in the following pages, in every technical file of our catalogue, you'll find:

PLUS

WARRANTIES

Thanks to the type of components used and to the top design, Greenled Industry can guarantee a duration of its luminaires higher than 3 times compared to the market standard. Besides the product warranty, Greenled Industry is able to guarantee a light efficiency performance higher than 80% with up to 150,000 hours of power on.

PLUS

ECONOMIC SAVINGS

Thanks to the Greenled Industry warranties, when you choose one of our products, you are actually buying a GUARANTEED SAVE. If you compare the lumen yield of a Greenled ceiling light with a traditional ceiling light, you will see that in order to generate the same amount of light, at least 50% less of energy will be consumed. If you multiply this save by the SERVICE LIFE GUARANTEED of the appliance, you will find out how much saving we are buying with the selection of a Greenled Industry product.

PLUS

REAL LUMEN/WATT RATIO

What is often reported in the catalogues on the market are the plate "data" of the marketed products. Many companies market products coming from Eastern Asia without even checking if these data are real. If you buy a Greenled Industry product, you can be sure that the ratio between the light output and energy consumption is actually the one stated, measured in a laboratory with the right advanced instruments.

PLUS

OPERATIONAL TEMPERATURE RANGE

Before being marketed, all Greenled Industry products must pass a very strict validation stage.

From design to sale, up to 18-24 months can go by, during which our products are tested both in a laboratory and in the most extreme use conditions, where they undergo the strictest tests. The temperature range reported in the catalogue does not result from the laboratory tests but from REAL tests.

TECHNOLOGY

In the Green Heart of Italy, the beating heart of all Greenled Industry luminaires was developed. In our laboratories, advanced technologies have been developed and patented that allow us to beat the main competitors in terms of light output, consumption and duration.

These are our secret ingredients:

ITR PERFORMANCE DRIVER

Built-in energy storage for the line “Industrial”, designed to be exclusively used for supplying power LEDs. Thanks to the design technology of the double-sided PCS, to the use of electronic components with an extended temperature range and the lack of electrolytic capacitors, the storage guarantees high standards in terms of efficiency and duration, with more than 150.000 hours of operation in extreme environments.

The energy storage module is provided with two independent protections against short circuits and excessive power absorption, such protections prevent from any breakage and guarantee the operation once the errors have been eliminated.

ULTRA STRENGHT SYSTEM

The innovative design of the systems “Industrial” consists in using a high heat dissipation resin in which all the electrical and electronic components are plunged.

Such a process avoids the need to use glass and allows an efficient heat dissipation guaranteeing at the same time maximum efficiency, duration and strength to shocks and vibrations, as well as total protection against dust and water, by ensuring also the electrical isolation of the equipment.

ITRPLED CONTROL SYSTEM

The luminaires can be provided with remote control functions, as well as with the possibility to regulate the luminous flux integrated in the remote control system. If requested by the customer, luminaires can communicate among each other through a new wireless ZigBee technology.

The ZigBee technology is based on radio connection with 2.4 GHz ISM band, thus overcoming all problems related to traditional analog and/or digital cabling; the ZigBee solution allows to reduce installation costs and guarantees higher reliability of the luminaire. The functions implemented in the remote control are:

1. **Constant maintenance of the brightness** through the automatic management of the LEDs (recovery of 1% every 12 months);
2. **Automatic dimming** of the brightness according to semi-static calendar. The possibility of changing dimming (optional) from remote control and/or a laptop is also provided;
3. **Executing commands** (Power on , power off, partialization) sent from remote center;
4. **Operational data detection** (Voltage, Current, Temperatures, Worked Hours) to be communicated day by day to the remote center;
5. **Self-testing and automatic sending of alarms** to remote center in case of partial/total malfunction;
6. **Total operational autonomy from the remote center**, it can work correctly with the parameters set in the factory also in case of absence of communication (in this case, only telemetry and management of the ON/OFF function as per calendar) are excluded.

SERVICES

Nowadays, a product company cannot only take care of the product, that's why Greenled Industry completes its line with two important services for LED technology:

FINANCE CARE SERVICE

Greenled Industry allows you to get profits out of your lighting appliance through financing solutions that combine efficiency-related savings and profits.

Thanks to agreements with the main Bank Institutes and Operating Leasing Companies, Greenled Industry provides its customers with the customized financing solutions able to support the final customer's needs.

In times as the one we are living when liquidity means to a company as much as oxygen to human beings, being able to innovate without resorting to one's own financial resources is the base for an excellent investment.

For this very reason, Greenled Industry has defined two support lines:

Operational leasing

With this solution, the final customer can have design, supply and installation of the new collection of turn-key lamps without having to worry about the financial resources required. Moreover, thanks to a service of O&M and all-risk insurance, the investment has no technological risks. The initial cost will be divided in constant monthly **customized instalments**, so to be totally covered by the energy savings obtained. Moreover, the fee may be completely deductible for Irap tax purposes and the costs incurred will have no impact on the company's balance sheet.

Third-party financing

For bigger interventions, customers can avail themselves of primary partner ESCo, allowing to upgrade the lighting plant at no cost. The ESCo will invest directly, by financing the whole intervention thus guaranteeing its own gain on the investment thanks to the energy savings obtained. The savings obtained are calculated and paid back with a guaranteed result by ESCo.

The final customer could benefit from a turn-key solution that includes the supply, design, installation, maintenance and financing of the appliance, all without any risk for its activity. This solution will also give the opportunity to obtain Energy Efficiency Certificates, the so-called White Certificates, trying to further optimize the operation profitability.

PROJECT CARE SERVICE

A well-conceived lighting project can contribute enormously to the comfort and quality of the environments and allows to obtain important efficiency results.

Our Design Office, composed of a staff of experts with high multidisciplinary skills is able to design and make appliances that guarantee efficiency, lighting and safety of the environments. Starting from the analysis and the characteristics of the place and objects to be illuminated, we develop a customized product by defining the number, type, power, distribution of the light sources required to achieve the result desired by the customer.

The technical evaluations, developed through the use of the lighting simulation software, specific to the levels of lighting, the luminance and homogeneity of the luminous flux required, help establish the best distance between the light sources, the energy consumption and the luminous efficiency of the appliance. There is also the possibility to implement the system through remote control and dimming of the luminaires based on specific needs. We give you a fast design of the solution to guarantee a top quality result.

REFERENCES

Greenled Industry offers Made in Italy LED lighting solutions that provide superior performance, reliability and durability to illuminate industries and public spaces.

With Greenled Industry solutions our customers dramatically reduce the cost of lighting, increase the quality of the environments and slash their carbon footprint.

For further information please visit our website www.greenledindustry.com



WHY GREENLED INDUSTRY?

We offer the most efficient lighting solutions combining a deep understanding of customers needs with our high expertise in lighting projects.

Greenled Industry is one of the few companies able to offer LED lighting solutions for industrial environments with extreme conditions such as foundries, glass works, cement plants, paper works, characterized by high and low temperatures (-40°C $+75^{\circ}\text{C}$) and high concentration of dust and humidity. In this environments traditional and also LED lighting systems are not able to guarantee the energy and lighting performance.

With our continue innovation focus and high-quality materials, we are able to offer excellent products and superior performance.

Our goal is to improve the lives and well-being of people both in industrial and public environments, ensuring safety and comfort in every space.

6 REASONS TO CHOOSE OUR LED LIGHTING SOLUTIONS

1 ENERGY EFFICIENCY

The best LEDs and drivers to provide maximum luminous flux with minimum power consumption

2 QUALITY

Selected components, made in Italy products ensuring reliability and durability

3 STRENGTH

Robust and resistance lighting fixtures, even in extreme environments

4 INTELLIGENCE

Through intelligent lighting control systems and occupancy sensors you can make the light smart and functional to the specific needs, while reducing further energy and maintenance costs

5 PAYBACK

With our lighting solutions payback time results very fast, reducing TCO (Total Cost of Ownership) of the entire lighting system.

6 FLEXIBILITY & CUSTOMIZATION

Greenled Industry offers a comprehensive range of solutions for industrial and public environments that meet each specific customer need, with the option to customize the luminaires according to the need.



INDUSTRIAL





VOLTA



The luminaire "Volta" has been designed to guarantee a high quality light, efficient and functional to the needs of several industrial environments.

The long-life supply technology and the high-efficiency LEDs guarantee the maximum luminous intensity with the minimum power absorbed and lighting levels, ideal and uniform over the time. The Greened solutions allow a high reduction of operational costs related to energy and maintenance and influence positively the company's goals of sustainability.

Thanks to the "instant on" LED function and to the iTRIPLE Control System to optimize the light where and when needed, the luminaires "Volta" allow to create safe and efficient environments, that increase health and productivity at work.

FEATURES

- Luminous efficiency higher than 113 lm/W
- Excellent thermal performances
- Appropriate for industrial contexts with extreme temperatures (-40° C/75°C), humid and dusty conditions (IP68)
- Reduced decrease of the luminous flux (L70) > 150.000 h
- Wide range of photometric symmetrical curves
- Photo-biological safety group 0 (N.a.)
- Wide range of models up to 118 W
- Ceiling, wall or suspended installation

RECOMMENDED APPLICATIONS

- Environments for metal working and transformation
- Foundries, mills
- Glassworks
- Cement plants
- Farms
- Plants
- Warehouses and refrigerating rooms
- Lighting of open spaces and parking lots

VOLTA



TECHNICAL CHARACTERISTICS

VOLTA product family				
Luminous flux at 5000K	7.400	9.600	11.900	13.350
(www) Consumption (W)	55	76	101	118
Power Factor (cos Fi)	≥0.9			
Operating voltage (V)	AC100~240			
(aaa) Number of LEDs	24 CREE power led			
Driving current (mA)	0750	1.000	1.300	1.500
(dd) Photometric curves	01: FWHM 60° - 02: FWHM 90° - 03 FWHM 30°+106°			
(mmmm) CCT (K)	4000 / 5000 / 5700			
Color rendering	>75			
Luminous flux duration (L70)	150.000h			
Working temperature	-40°C/+75°C			
Protection level	IP68			
Material	6063 Anodized Aluminium - Stainless steel			
Standard Cable Length (ml)	2			
(h) Installation type	1: With fixing bracket			
Sizes (mm)	324x487x205			
Weight (Kg)	11			


WARRANTY

- > 10 year warranty against manufacturing defects
- > 15 year warranty of luminous efficiency higher than 80 % PLUS


PLUS

ENERGY SAVINGS


SAVING GENERATED DURING THE PRODUCT SERVICE LIFE [150,000 hours]

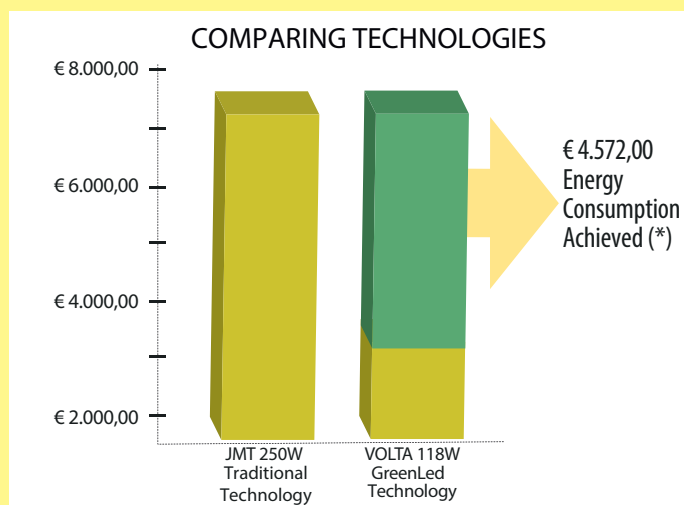


(*) Saving potential compared with a 2500 W metal halide headlamp operating for 150,000 hours, with a constant cost of electricity equal to 0.18 /kWh. The calculation is prudential as it does not include maintenance costs and the wear of the traditional technology.

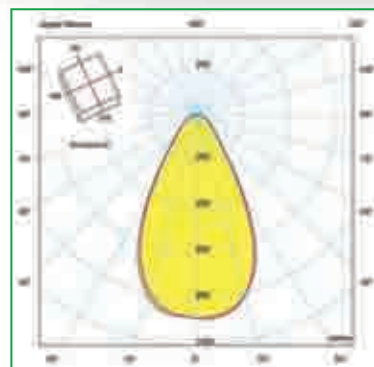

Photometric symmetrical curve (FWHM 60°)

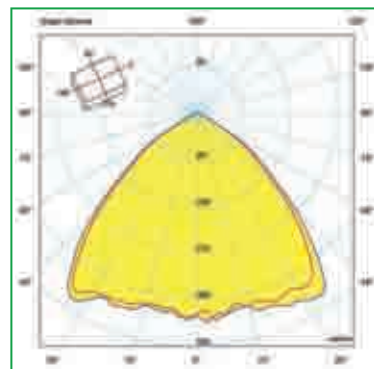

Photometric symmetrical curve (FWHM 90°)

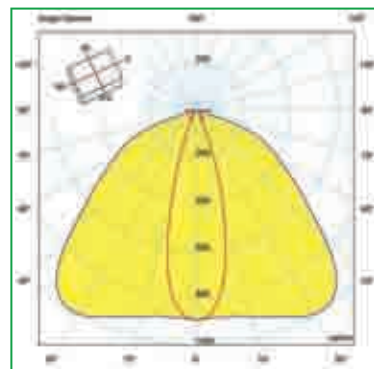

Photometric symmetrical curve (FWHM 30°+106°)

CERTIFICATIONS

CE (Directive 2004/108/CE and updates)
CEI EN 55015
CEI EN 61000-3-2, CEI EN 61000-3-3, CEI EN 61000-4-2, CEI EN 61000-4-4, CEI EN 61000-4-5
EN 61000-4-6
EN 61000-4-3, CEI EN 61000-4-11
CEI EN 61547
EN 62471
CEI 60598-1-1, CEI 60598-2-3
CEI 61347-2-13
CEI 62031



MATTEUCCI



The luminaire Matteucci is the ideal solution for the lighting of industrial productive areas as it guarantees the maximum energy saving with uniform and appropriate illumination levels without shades and with an excellent color rendering, even from high installations. Luminaires reduce dramatically all maintenance costs, as they offer a long life, are robust, have a low rate of fault and resist to shocks and vibrations.

Moreover, luminaires are designed with the innovative feature Ultra Strength System and with no glass which help rapidly clean the equipment, even in areas difficult to reach, thus guaranteeing the correct lighting over the time. The lighting solution Matteucci contributes to create safer, more efficient and productive work environments thanks to an excellent illumination that makes sure areas are correctly illuminated and comfortable.

FEATURES

- Luminous efficiency higher than 113 lm/W
- Excellent thermal performances
- Appropriate for industrial contexts with extreme temperatures (-40° C/75°C), humid and dusty conditions (IP68)
- Reduced decrease of the luminous flux (L/70)> 150.000 h
- Wide range of photometric symmetrical curves
- Photo-biological safety group 0 (N.a.)
- Wide range of models from 127 W to 236 W
- Ceiling, wall or suspended installation

RECOMMENDED APPLICATIONS

- Environments for metal working and transformation
- Foundries, mills
- Glassworks
- Cement plants
- Farms
- Warehouses and plants
- Lighting of open spaces and parking lots
- Roundabouts

MATTEUCCI



TECHNICAL CHARACTERISTICS

MATTEUCCI product family			
Luminous flux at 5000K	19.200	23.900	26.700
(www) Consumption (W)	151	201	236
Power Factor (cos Fi)	≥0.9		
Operating voltage (V)	AC100~240		
(aaa) Number of LEDs	48 CREE power led		
Driving current (mA)	1.000	1.300	1.500
(dd) Photometric curves	01: FWHM 60° - 02: FWHM 90° - 03: FWHM 30°+106°		
(mmm) CCT (K)	4000 / 5000 / 5700		
Color rendering	>75		
Luminous flux duration (L70)	150.000h		
Working temperature	-40°C/+75°C		
Protection level	IP68		
Material	6063 Anodized Aluminium – Stainless steel		
Standard Cable Length (ml)	2		
(h) Installation type	1: With fixing bracket		
Sizes (mm)	564x487x205mm		
Weight (Kg)	18 kg		


WARRANTY

- 10 year warranty against manufacturing defects
- 15 year warranty of luminous efficiency higher than 80 % PLUS


PLUS

ENERGY SAVINGS


SAVING GENERATED DURING THE PRODUCT SERVICE LIFE [150,000 hours]

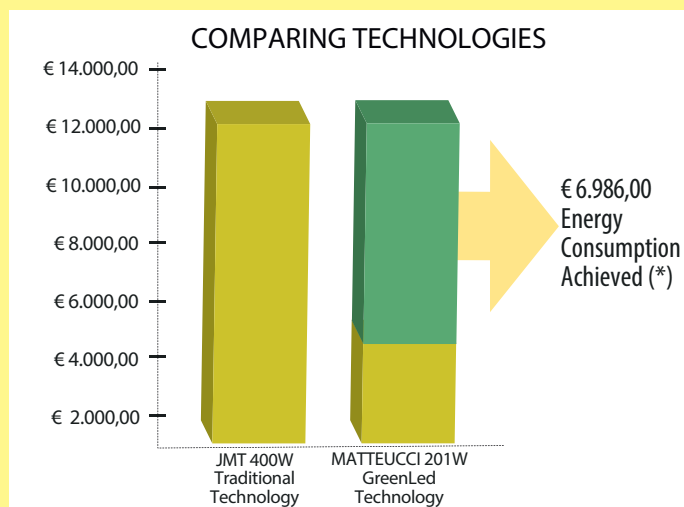


(*) Saving potential compared with a 400 W headlamp operating for 150,000 hours, with a constant cost of electricity equal to 0.18 /kWh. The calculation is prudential as it does not include maintenance costs and the wear of the traditional technology.

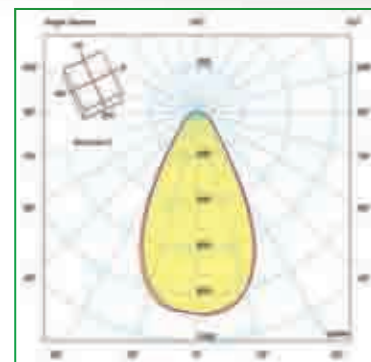

Photometric symmetrical curve (FWHM 60°)

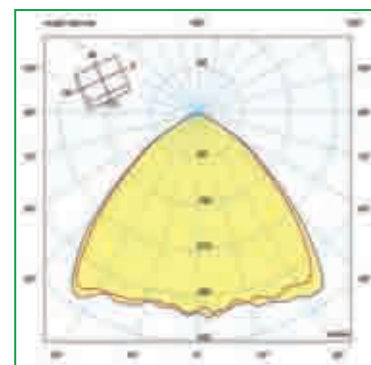

Photometric symmetrical curve (FWHM 90°)

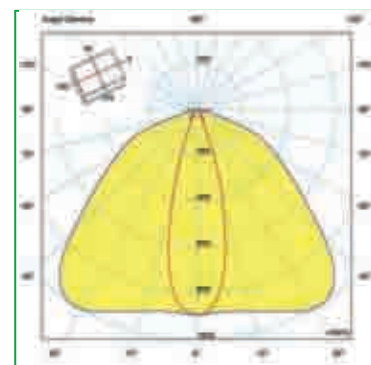


Photometric symmetrical curve (30° +106°)

CERTIFICATIONS

CE (Directive 2004/108/CE and updates)
 CEI EN 55015
 CEI EN 61000-3-2, CEI EN 61000-3-3, CEI EN 61000-4-2, CEI EN 61000-4-4, CEI EN 61000-4-5
 EN 61000-4-6
 EN 61000-4-3, CEI EN 61000-4-11
 CEI EN 61547
 EN 62471
 CEI 60598-1-1, CEI 60598-2-3
 CEI 61347-2-13
 CEI 62031



B BLOCK

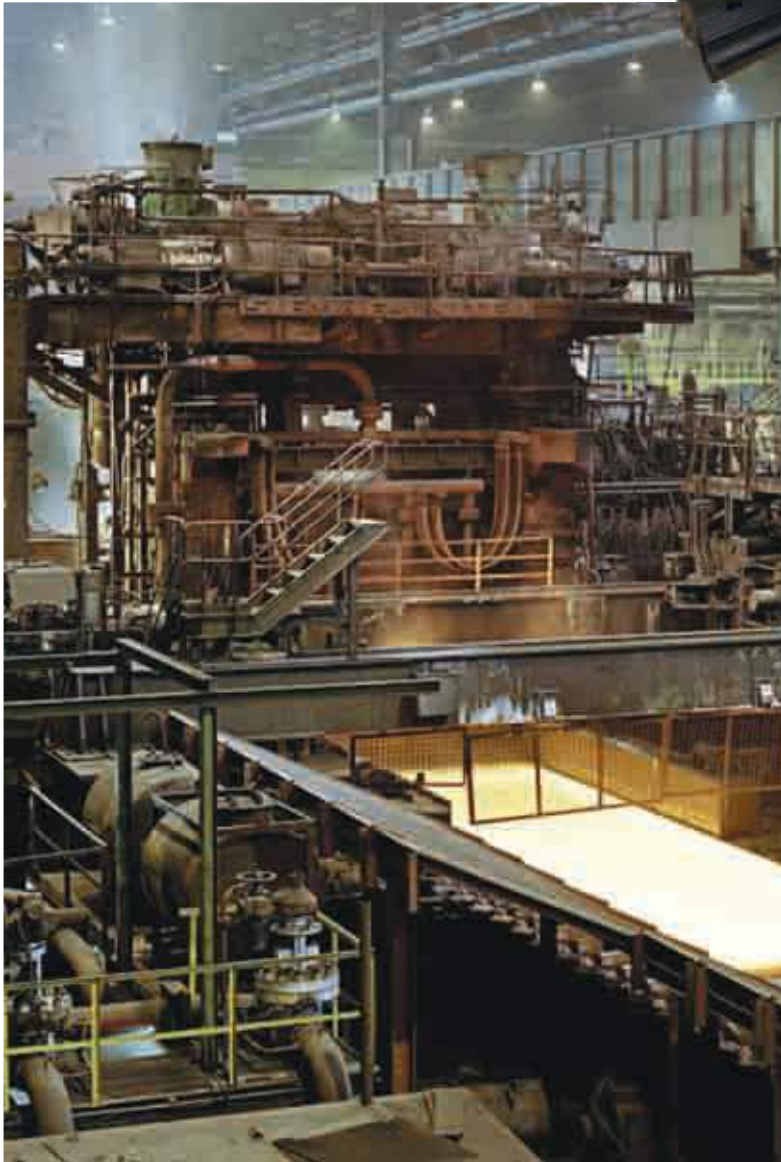

The luminaire BBlock is a modular unit designed to offer high-efficiency solutions to industrial applications, interiors and exteriors. Provided with a modern design and available in a wide range of power and values of luminous flux, the unit is extremely flexible and functional to the needs of different environments.

The robust BBlock offers high-quality light, long life, excellent thermal performances and high luminous efficiencies with remarkable energy savings.

Installation is simple and fast thanks to the easy connections and different types of installation. In order to further reduce costs and make the light system more functional and efficient, the luminaires BBlock can be equipped with the system of remote control, thus allowing to manage and regulate the luminous flux according to the needs and to obtain further savings.

FEATURES

- IP20 (IP66 on request) and IK08
- Symmetrical luminous fluxes for the industrial sector
- Wide range of luminous fluxes (up to 22.000 lm)
- Luminous efficiency higher up to 110 lm/W
- Energy savings up to 80%
- Excellent thermal performances
- Reduced decrease of the luminous flux (L/70)> 60,000 h
- Photo-biological safety group 0 (N.a.)
- Available in the models with 1, 2 and 3 modules

RECOMMENDED APPLICATIONS


- Industrial buildings
- Warehouses and storage rooms
- Logistic sector
- Repair shops
- Service stations, petrol stations
- Headlamps, armored applications

B BLOCK



TECHNICAL CHARACTERISTICS

BBLOCK family product			
Luminous flux at 5000K (lm)	6.950	13.900	20.900
(www) Consumption (W)	65	130	195
Power Factor (cos Fi)	≥0.9		
Operating voltage (V)	AC100~240		
(aaa) Number of LEDs	36	72	108
Driving current (mA)	600		
(dd) Photometric curves	06: Symmetrical ID		
(mmm) CCT (K)	4000 / 5000 / 5700		
Color rendering	>70		
Luminous flux duration (L70)	>60.000h		
Working temperature	- 20°C ~ +45°C		
Protection level	IP66		
Material	6063 Anodized Aluminium – Stainless steel		
Standard Cable Length (ml)	2		
(h) Installation type	3: ceiling - 4: suspension		
Sizes (mm)	311,3x184,3x86,5	357x166x71	496x166x186
Weight (Kg)	4 kg	6,55 kg	10,5 kg

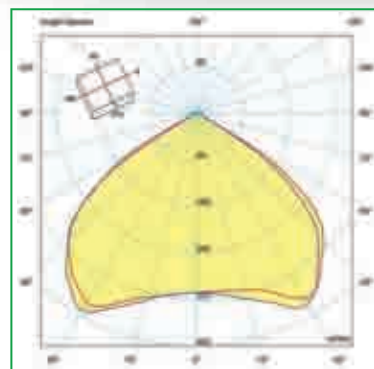

Photometric symmetrical curve ID


WARRANTY

➤ 6 year warranty against manufacturing defects



ENERGY SAVINGS

SAVING GENERATED DURING THE PRODUCT SERVICE LIFE [50,000 hours]

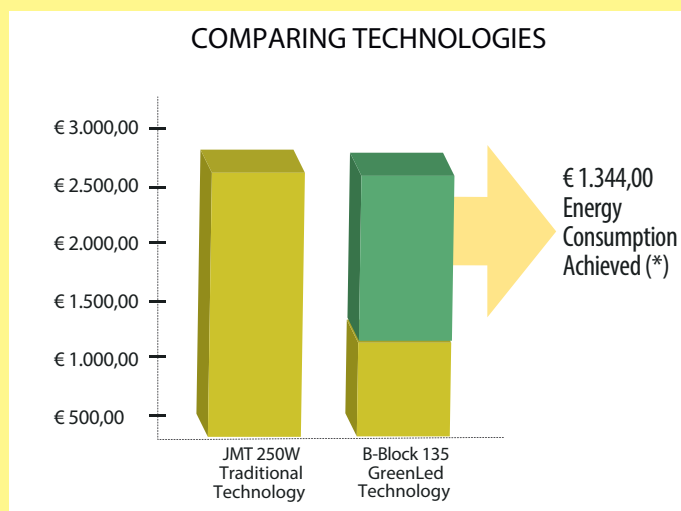


(*) Saving potential compared with a 250 W metal halide headlamp operating for 50,000 hours, with a constant cost of electricity equal to 0.18 /kWh. The calculation is prudential as it does not include maintenance costs and the wear of the traditional technology.

CERTIFICATIONS

EN 60598-1:2008 A11:2009,
EN 60598-2-5:1999,
IEC 61347-1:2008
IEC 61347-2-13:2006
IEC 62031:2008
CEI EN 60529 (CEI 70-1)
EN 62471:2008
EN 55015:2006
EN 61547:1995



DA VINCI

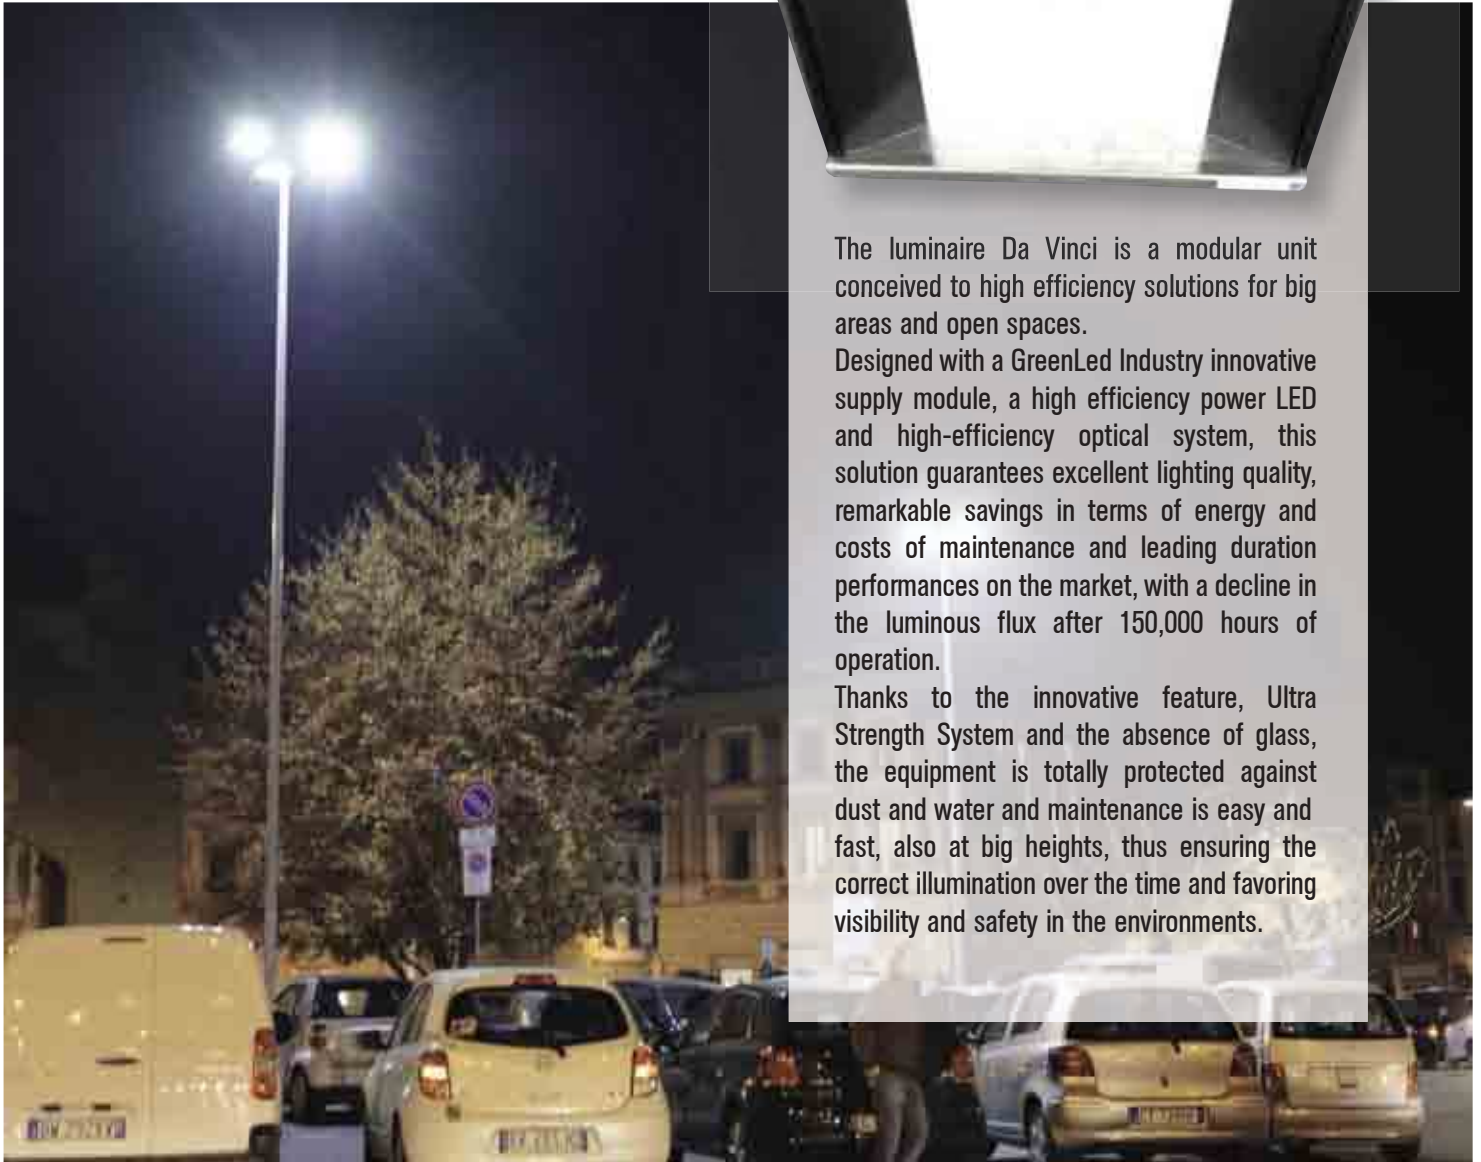

The luminaire Da Vinci is a modular unit conceived to high efficiency solutions for big areas and open spaces.

Designed with a GreenLed Industry innovative supply module, a high efficiency power LED and high-efficiency optical system, this solution guarantees excellent lighting quality, remarkable savings in terms of energy and costs of maintenance and leading duration performances on the market, with a decline in the luminous flux after 150,000 hours of operation.

Thanks to the innovative feature, Ultra Strength System and the absence of glass, the equipment is totally protected against dust and water and maintenance is easy and fast, also at big heights, thus ensuring the correct illumination over the time and favoring visibility and safety in the environments.

FEATURES

- Luminous efficiency higher than 113 lm/W
- Excellent thermal performances
- Appropriate for humid and dusty environments (IP67)
- Reduced decrease of the luminous flux (L70) > 150,000 h
- Wide range of symmetrical photometric curves for the road sector
- Photo-biological safety group 0 (N.a.)
- Available in the models with 2 power classes (55W-118W, 127W-236W)
- Pole-mounted installation

RECOMMENDED APPLICATIONS

- Industrial buildings road access
- Big road junctions
- Farms
- Plants and warehouses
- Lighting of open spaces, parking lots

DA VINCI




TECHNICAL CHARACTERISTICS


DA VINCI product family							
Luminous flux at 5000K(lm)	7.400	9.600	11.800	13.500	19.200	23.900	26.700
(www) Consumption (W)	55	76	101	118	151	201	236
Power Factor (cos Fi)	≥0.9						
Operating voltage (V)	AC100~240						
(aaa) Number of LEDs	24 CREE power led				48 CREE power led		
Driving current (mA)	0750	1.000	1.300	1.500	1.000	1.300	1.500
(dd) Photometric curves	04: Road asymmetrical T3 - 05: Symmetrical 120° Roundabouts						
(mmm) CCT (K)	4000 / 5000 / 5700						
Color rendering	>75						
Luminous flux duration (L70)	150.000h						
Working temperature	-40°C/+75°C						
Protection level	IP67						
Material	6063 Anodized Aluminium – Stainless steel						
Standard Cable Length (ml)	2						
(h) Installation type	2: Pole-mounted						
Sizes (mm)	324x487x205mm				564x487x205mm		
Weight (Kg)	10				17		

WARRANTY

- > 10 year warranty against manufacturing defects
- > 15 year warranty of luminous efficiency higher than 80 % PLUS




Photometric symmetrical curve (120° roundabouts)



Photometric asymmetrical curve T3

ENERGY SAVINGS

SAVING GENERATED DURING THE PRODUCT SERVICE LIFE [150,000 hours]

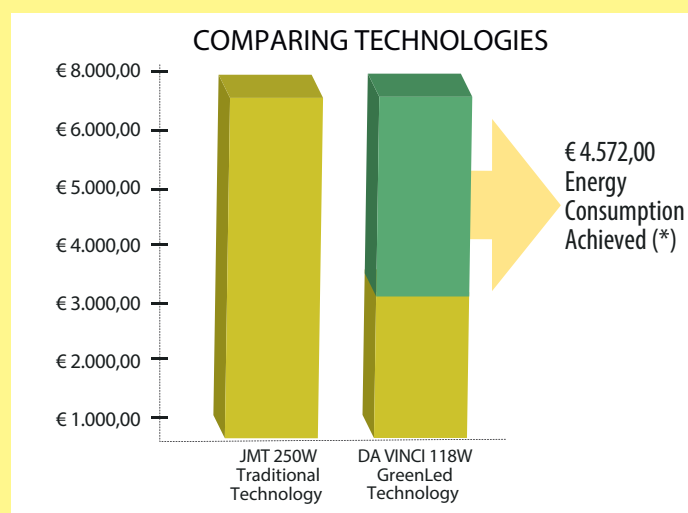

(*) Saving potential compared with a 250 W metal halide headlamp operating for 150,000 hours, with a constant cost of electricity equal to 0.18 /kWh. The calculation is prudential as it does not include maintenance costs and the wear of the traditional technology.


CERTIFICATIONS

CE (Directive 2004/108/CE and updates)
 CEI EN 55015
 CEI EN 61000-3-2, CEI EN 61000-3-3, CEI EN 61000-4-2, CEI EN 61000-4-4, CEI EN 61000-4-5
 EN 61000-4-6
 EN 61000-4-3, CEI EN 61000-4-11
 CEI EN 61547
 EN 62471
 CEI 60598-1-1, CEI 60598-2-3
 CEI 61347-2-13
 CEI 62031




Industrial

ACCESSORIES INCLUDED

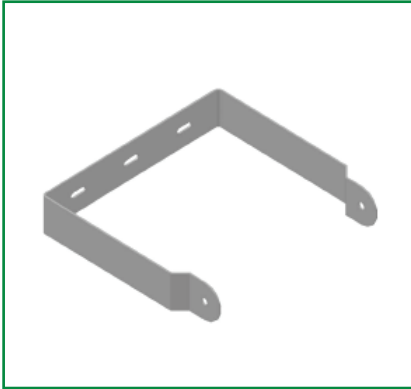

**MOUNTING BRACKET
VOLTA**

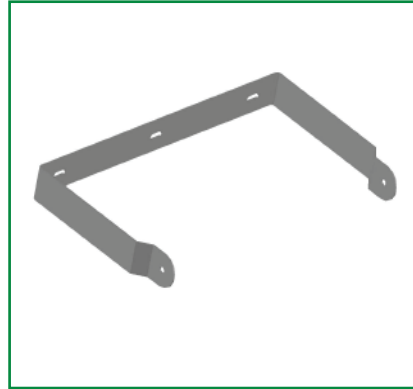

**MOUNTING BRACKET
MATTEUCCI**

INTELLIGENT CONTROL SYSTEM - optional

Intelligent lighting control and management systems allow you to set the lighting of the different areas, providing maximum flexibility in different industrial environments.

Thanks to smart lighting control you can optimize energy efficiency, reducing costs without wastes of energy.


LIGHT WHERE AND WHEN YOU NEED IT

With Greenled Industry smart lighting control systems the environment become more efficient. The luminaires can be equipped with occupancy sensors and the smart lighting control systems. The result? Greater efficiency, high savings and the proper lighting that ensures safety and visual comfort.


For further information, please contact Greenled Industry.

PHOTOMETRIC INFORMATION


Volta-Matteucci: FWHM 60°

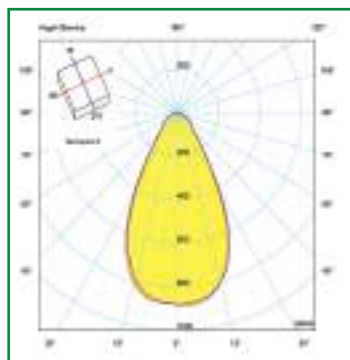


Volta-Matteucci: FWHM 90°

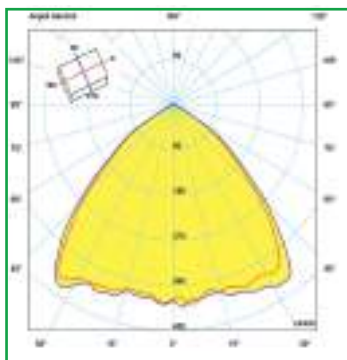


Volta-Matteucci: FWHM 30°+106°

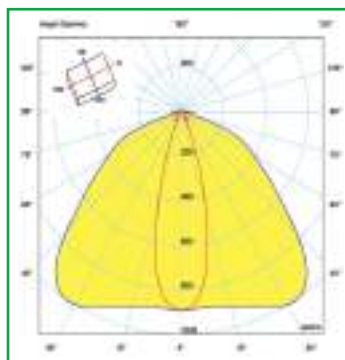


BBlock: SYMMETRICAL ID

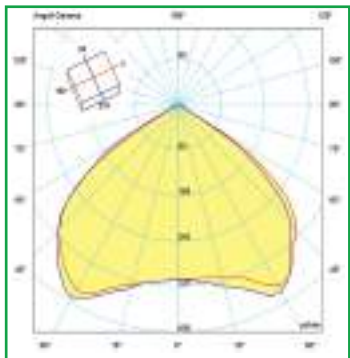

Da Vinci: FMWH 120°

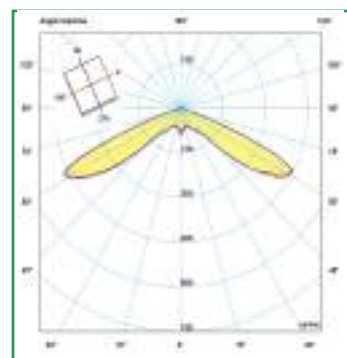

Da Vinci: ASYMMETRICAL T3

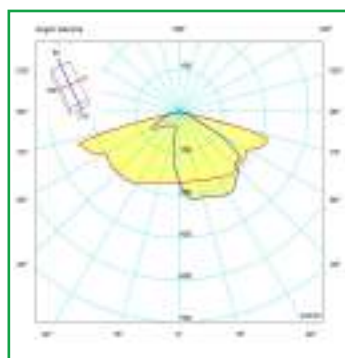

ORDER INFORMATION

The table below provides the useful information to get the order code. Select the type of luminaire power (W), the optical configuration and the color temperature desired. In case of options, please indicate the type.


SERIE S		POWER		OPTICAL		CCT		OPTION					
VL	Volta	-55	55W	-01	FWHM 60°								
		-76	76W										
DV	Da Vinci	-101	101W						-02	FWHM 90°			
		-118	118W						-03	FWHM 30°+106°			
MT	Matteucci	-152	152W						-04	ASYMMETRICAL T3	-40	4000K	-T Remote control
		-202	202W						-05	FWHM 120°	-50	5000K	
		-236	236W								-57	5700K	
BB	B Block	-65	65W	-06	SIMMETRYCAL ID								
		-130	130W										
		-195	195W										



TOWERLIGHT



SPARTA

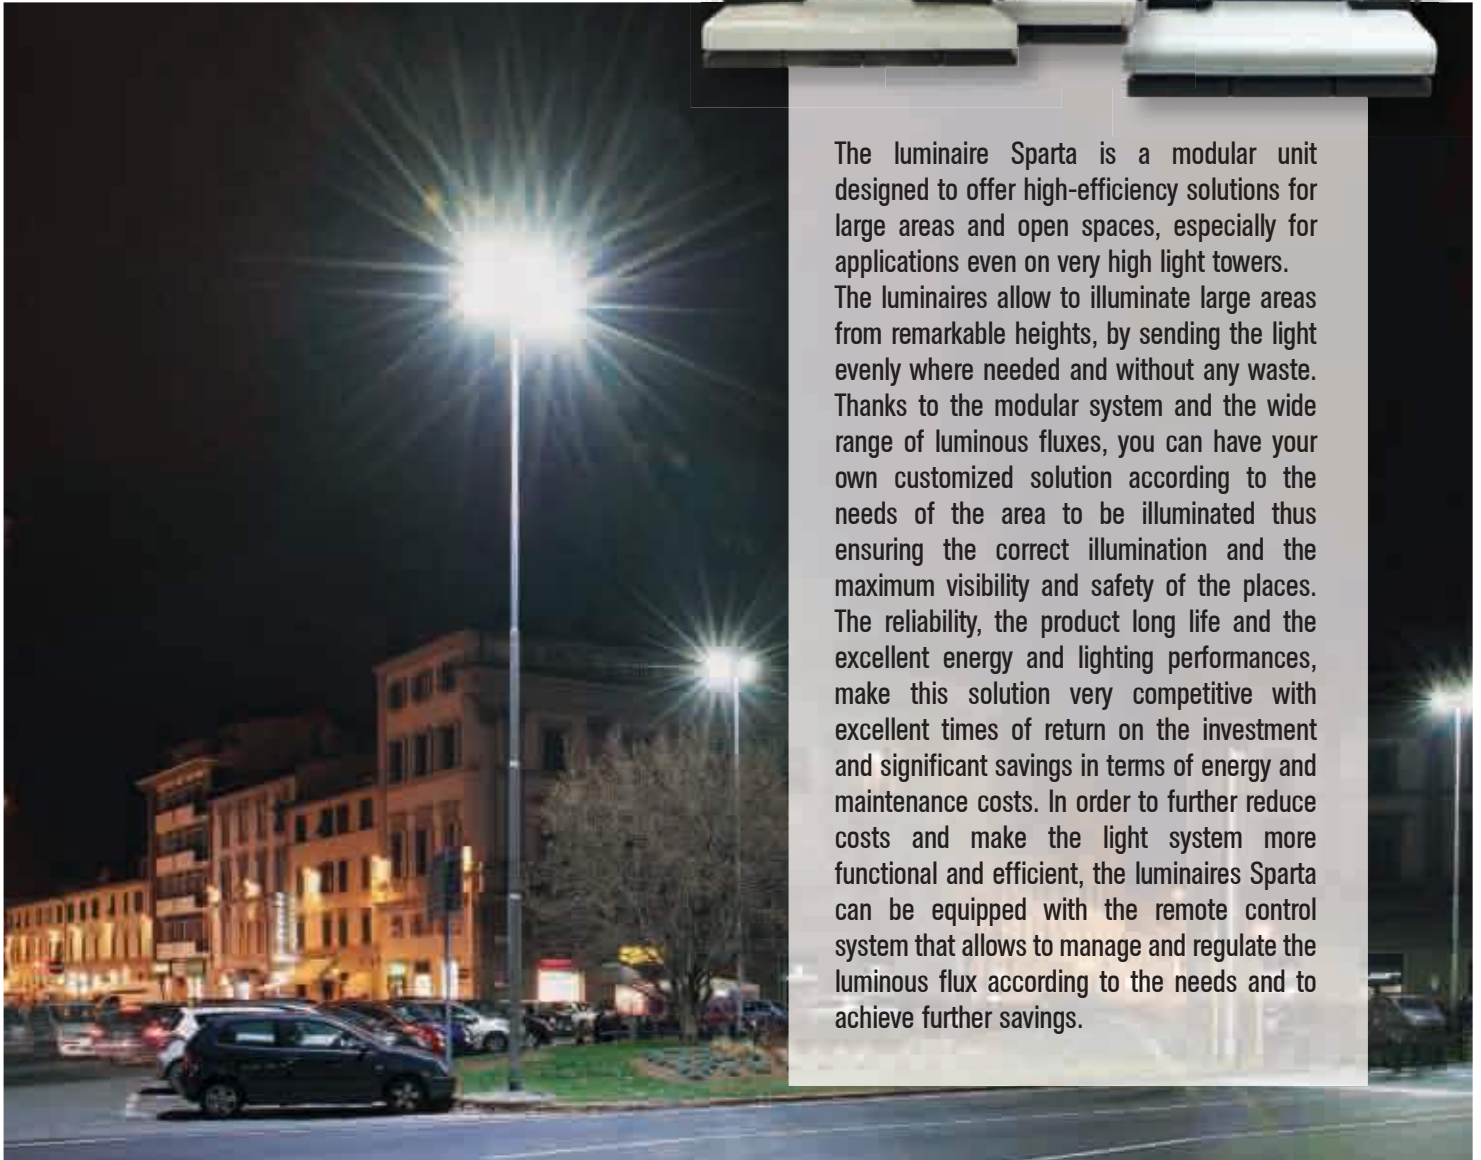

The luminaire Sparta is a modular unit designed to offer high-efficiency solutions for large areas and open spaces, especially for applications even on very high light towers. The luminaires allow to illuminate large areas from remarkable heights, by sending the light evenly where needed and without any waste. Thanks to the modular system and the wide range of luminous fluxes, you can have your own customized solution according to the needs of the area to be illuminated thus ensuring the correct illumination and the maximum visibility and safety of the places. The reliability, the product long life and the excellent energy and lighting performances, make this solution very competitive with excellent times of return on the investment and significant savings in terms of energy and maintenance costs. In order to further reduce costs and make the light system more functional and efficient, the luminaires Sparta can be equipped with the remote control system that allows to manage and regulate the luminous flux according to the needs and to achieve further savings.

FEATURES

- > IP66 and IK08
- > Wide range of symmetrical luminous fluxes (industrial sector) and asymmetrical luminous fluxes (road sector)
- > Wide range of luminous fluxes (from 28.000lm to 56.000lm)
- > Luminous efficiency up to 100lm/W
- > Excellent thermal performances
- > Reduced decrease of the luminous flux ($L/70$) > 60.000 h
- > Photo-biological safety Group 0 (No)
- > Available in the models with 4, 6 and 8 modules
- > Installation on a light tower (height up to 40m)

RECOMMENDED APPLICATIONS

- > Industrial buildings
- > Large areas lighting
- > Parking areas
- > Light Tower
- > Roundabouts
- > Motorway links

SPARTA



TECHNICAL CHARACTERISTICS

SPARTA product family			
Luminous flux at 5000K (lm)	28.200	42.300	53.400
(www) Consumption (W)	265	400	533
Power Factor (cos Fi)	≥0.9		
Operating voltage (V)	AC100~240		
(aaa) Number of LEDs	144	216	288
Driving current (mA)	600		
(dd) Photometric curves	07: Asymmetrical AU - 08: Asymmetrical PM		
(mmm) CCT (K)	4000/5000/5700		
Color rendering	>70		
Luminous flux duration (L70)	60.000h		
Working temperature	24°C/+45°C		
Protection level	IP66		
Material	6063 Anodized Aluminium – Stainless steel		
Standard Cable Length (ml)	2		
(h) Installation type	1: With fixing bracket		
Sizes (mm)	473x363x322	567x363x322	723x363x322
Weight (Kg)	18	22	24


WARRANTY

➤ 6 year warranty against manufacturing defects



ENERGY SAVINGS

SAVING GENERATED DURING THE PRODUCT SERVICE LIFE [50,000 hours]

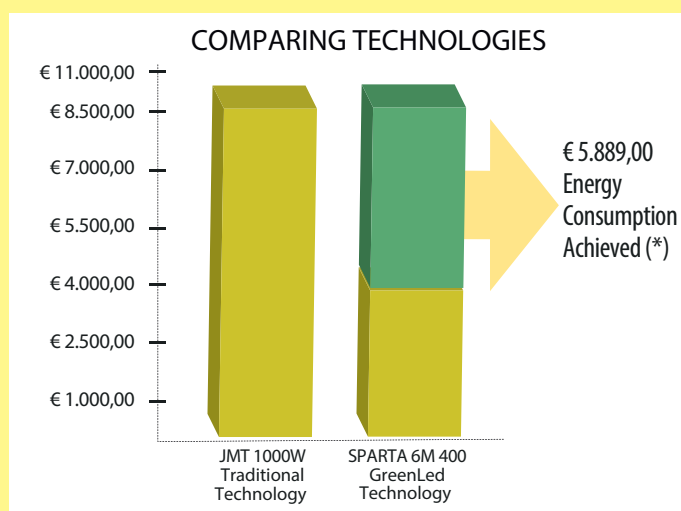

(*) Saving potential compared with a 1000 W metal halide headlamp operating for 50,000 hours, with a constant cost of electricity equal to 0.18 /kWh. The calculation is prudential as it does not include maintenance costs and the wear of the traditional technology.

CERTIFICATIONS

EN 60598-1:2008
 EN 60598-2-3:2012
 IEC 61347-2-13:2006
 IEC 62031:2012
 IEC 61547:2009
 IEC 61000-3-2:2009
 IEC 61000-3-3:2013
 EN 62471:2006
 EN 55015:2013



Tower Light

ACCESSORIES INCLUDED



**SPARTA-265
MOUNTING BRACKET**



**SPARTA-400
MOUNTING BRACKET**



**SPARTA-533
MOUNTING BRACKET**

INTELLIGENT CONTROL SYSTEM - optional

Intelligent lighting control and management systems allow you to set the lighting of the different areas, providing maximum flexibility in different outdoor environments.

LIGHT WHERE AND WHEN YOU NEED IT


With Greenled Industry smart lighting control systems the environment become more efficient. The luminaires can be equipped with smart lighting control systems.

What is the result? Greater efficiency, high savings and the proper lighting that ensures safety and visual comfort.


For further information, please contact Greenled Industry.

PHOTOMETRIC INFORMATION

Sparta: AU

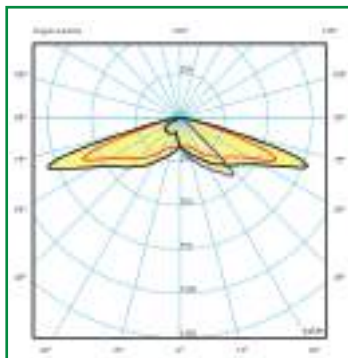

Sparta: PM

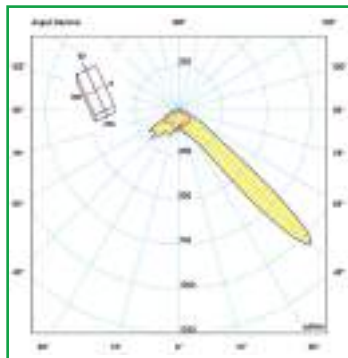

ORDER INFORMATION


The table below provides the useful information to get the order code. Select the type of luminaire power (W), the optical configuration and the color temperature desired. In case of options, please indicate the type.

SERIES		POWER		OPTICAL		CCT		OPTION	
SP	Sparta	-265	265W	-07	AU	-40	4000K	-T	Remote control
		-400	400W	-08	PM	-50	5000K		
		-533	533W			-57	5700K		



STREET & URBAN



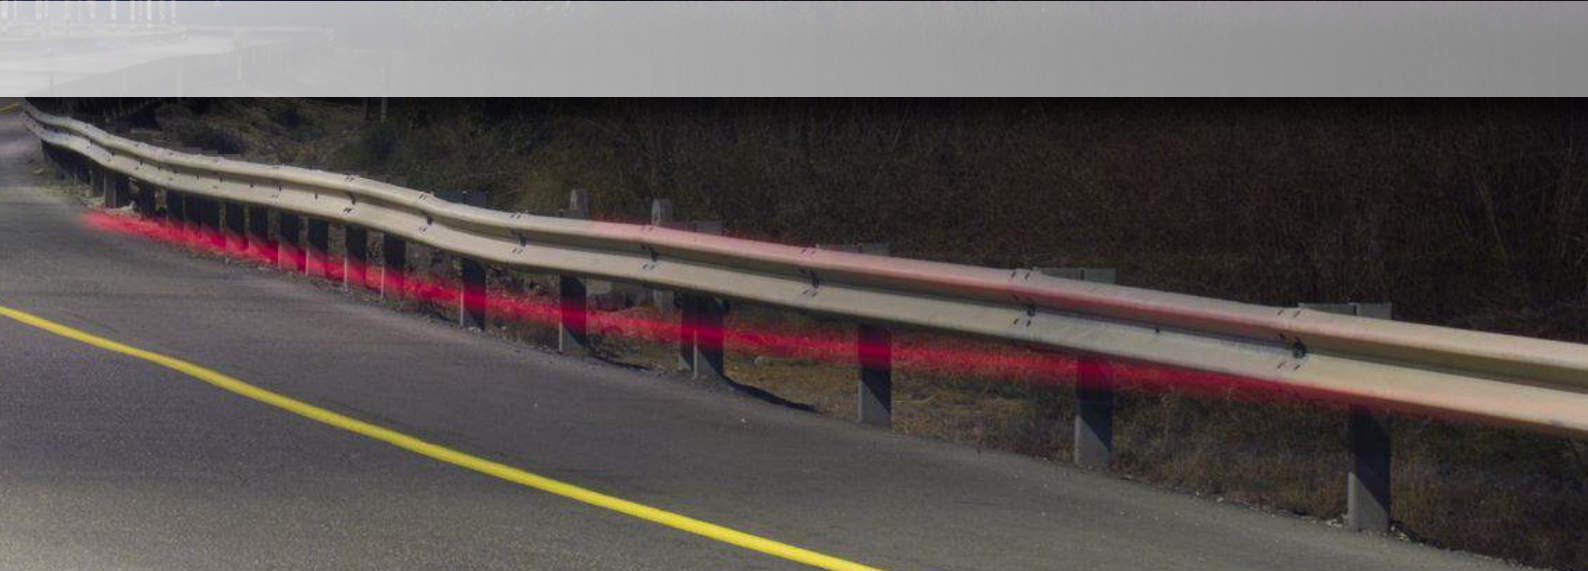

LÙMINO



The Lùmino series is one of the best solution that meets the need of most modern Smart Cities with minimum investment.

Unique design, high performance, reliable, Lùmino ensures the proper distribution of luminance, according to the requirements set by the standards. The high luminous efficiency guaranteed over the time and the reduced need of maintenance interventions, allow the Lùmino fixture to maximize the energy saving and the return on investment. Six power versions, a wide range of optic options, Lùmino is a versatile solution perfectly suitable to any street and outdoor application.

With Lùmino we can make our cities more livable, sustainable and efficient, increasing visibility and safety for citizens.

FEATURES

- > Moder design
- > High energy efficiency
- > IP66
- > High resistance (IK08)
- > Energy saving over 50% than traditional technologies
- > Wide optic options to accomodate a wide range of applications.
- > Quick and easy installation and maintenance
- > Long lifetime, with over 60.000 hours of high quality luminous flux.

RECOMMENDED APPLICATIONS

- > Street and urban road
- > Highway, Crossroad
- > Parking, Large area

LUMINO



TECHNICAL CHARACTERISTICS

Product code	LM-35	LM-50	LM-65	LM-100	LM-135	LM-165	LM-200
Luminous flux at 5700K (lm)	3.565	5.750	7.130	10.695	14.260	17.825	21.390
(ww) Power consumption (W)	31	50	62	93	124	155	186
Power Factor (cos Fi)	≥0.9						
Operating Voltage (V)	AC220~240						
Number of LEDs	14	28	42	56	70	84	
(ff) Photometric curves	1M, 2M, 3M, 5S						
(kk) CCT (K)	30: 3000K / 40: 4000K / 50: 5000K / 57: 5700K						
Color rendering	>70						
Duration of luminous flux (L70)	> 60.000h						
Operating Temperature	-40°C/+50°C						
Protection level	IP66						
Materials	die-cast aluminum - anodized aluminum						
Standard cable lenght (m)	1						
Installation	Pole connection						
Dimensions (mm)	431x316x136	504x316x136	577x316x136	650x316x136	723x316x136	796x316x136	
Weight (Kg)	5,3	6,1	7,3	8,2	9,0	9,9	


WARRANTY

➤ 6 year warranty against manufacturing defects



ENERGY SAVINGS

SAVING GENERATED DURING THE PRODUCT SERVICE LIFE [50,000 hours]

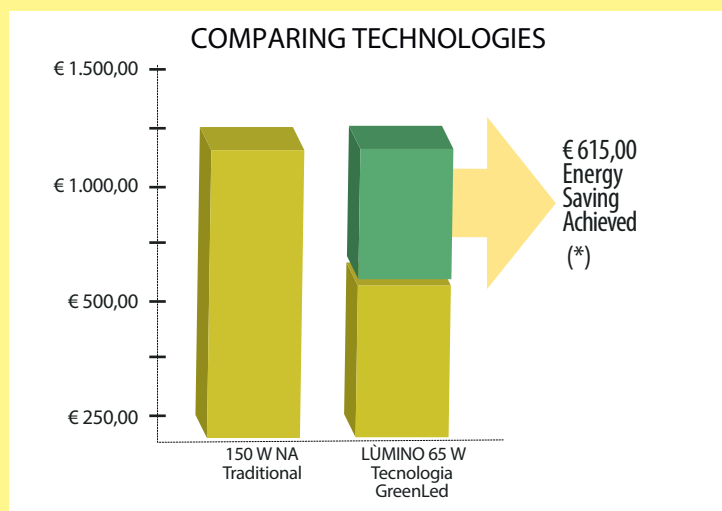

(*) Saving potential compared with a 1000 W metal halide headlamp operating for 50,000 hours, with a constant cost of electricity equal to 0.18 /kWh. The calculation is prudential as it does not include - maintenance costs and the wear of the traditional technology.

CERTIFICATIONS

EN 55015:2013
 EN 61000-3-2:2006 +A1:2009 + A2:2009
 EN 61000-3-3:2013
 EN 60598-2-1:1989
 EN 61547:2009
 EN 60598-1:2008 +A11:2009
 EN 61347-2-13:2006
 EN 61347-1:2008 +A1:2011
 EN 62031:2008
 EN 62493:2010



IP66



URBAN RELAMPING KIT



Kit Retrofit allows you to upgrade the lighting of urban areas and historical centers using flexibility and the superior performance of LED technology while preserving the cultural and historical value of the lantern.

The KIT RETROFIT fits perfectly inside the existing fixture, without structural changes and allows for quick and easy maintenance of all electrical accessories.

The Kit Retrofit is available in two power range and with different optical configurations to optimize the distribution of light and illuminate any space properly.

FEATURES

- High flexibility
- High energy efficiency
- IP66
- Instant on with 100% of luminous flux
- Long lifetime, with over 60.000 hours of high quality luminous flux
- Reduction of maintenance costs
- Quick and easy installation

RECOMMENDED APPLICATIONS

- Urban and residential areas
- Historical centers

URBAN RELAMPING KIT

TECHNICAL CHARACTERISTICS

Product code	KR-35	KR-65
Luminous flux at 5700K (lm)	3.640	6.760
(ww) Power consumption (W)	35	65
Power Factor (cos Fi)	≥0.9	
Operating Voltage (V)	AC220~240	
Numbers of LEDs	14	28
(ff) Photometric curves	1M, 2M, 3M, 5S	
(kk) CCT (K)	30: 3000K / 40: 4000K / 50: 5000K / 57: 5700K	
Color rendering	>70	
Duration of luminous flux (L70)	> 60.000h	
Operating temperature	-40°C/+50°C	
Protection level	IP66	
Materials	Fe 360 galvanized metal sheet. White powder coated RAL 9003	
Standard cable lenght		
Installation		
Dimensions (mm)	337x337x62	337x337x100,5


WARRANTY

➤ 6 year warranty against manufacturing defects



ENERGY SAVINGS

SAVING GENERATED DURING THE PRODUCT SERVICE LIFE [50,000 hours]

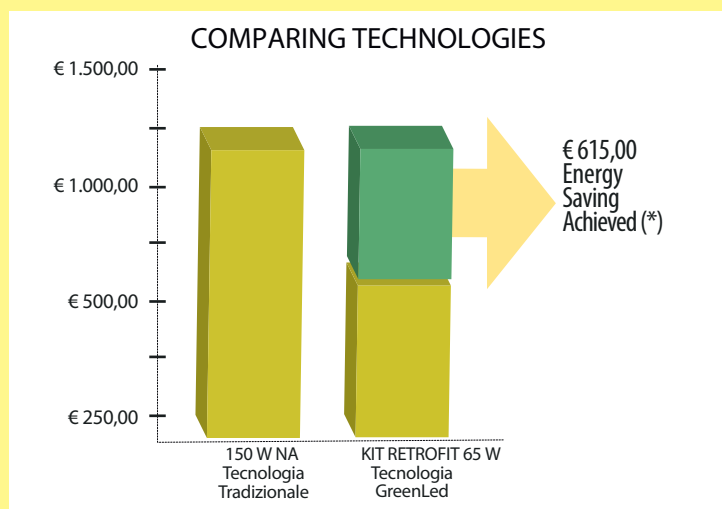

(*) Saving potential compared with a metal halide headlamp operating for 50,000 hours, with a constant cost of electricity equal to 0.18 /kWh. The calculation is prudential - as it does not include - maintenance costs and the wear of the traditional technology.

CERTIFICATIONS

EN 55015:2013
 EN 61000-3-2:2006 +A1:2009 + A2:2009
 EN 61000-3-3:2013
 EN 60598-2-1:1989
 EN 61547:2009
 EN 60598-1:2008 +A11:2009
 EN 61347-2-13:2006
 EN 61347-1:2008 +A1:2011
 EN 62031:2008
 EN 62493:2010



IP66



Street & Urban

MAIN CHARACTERISTICS LÙMINO



Innovative pole fitter design not only achieve the horizontal and vertical installation features, also has 0-15° adjustable function for each installation direction.

Reasonable heat sink design, not only keep ventilation but also avoid laceration. Gaps between each module are increased heat dissipation speed and solved the problem of dust deposition.

INTELLIGENT CONTROL SYSTEM - optional

Intelligent lighting control and management systems allow you to set the lighting of the different areas, providing maximum flexibility in different outdoor and urban environments.

LIGHT WHERE AND WHEN YOU NEED IT

With Greenled Industry smart lighting control systems the environment become more efficient.


The luminaires can be equipped with smart lighting control systems.

What is the result? Greater efficiency, high savings and the proper lighting that ensures safety and visual comfort.


For further information, please contact Greenled Industry.

PHOTOMETRIC INFORMATION


1M

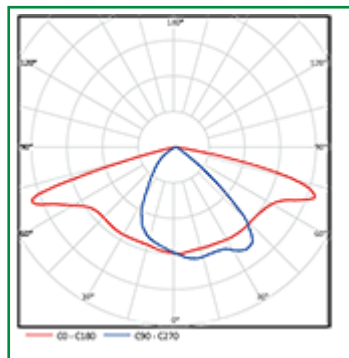


2M

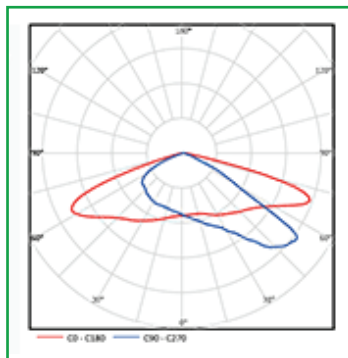

3M

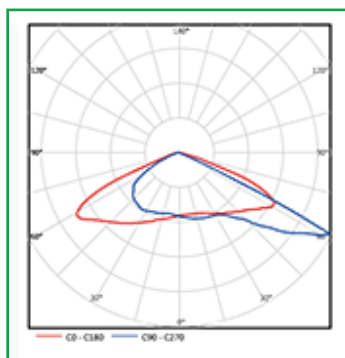

5S

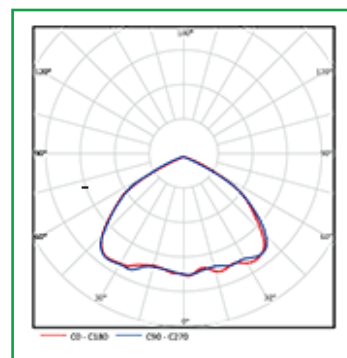

ORDER INFORMATION

The table below provides guidelines for encoding item numbers when ordering Lùmino fixtures. Select a fixture power, optic and CCT, using character codes in bold when ordering. In case of optional, select the type.

SERIES	POWER	OPTICAL	CCT	OPTION
LM Lùmino KR Kit Retrofit	-35 31W	-1M	-30 3000K	-T Remote control
	-50 50W	-2M	-40 4000K	
	-65 62W	-3M	-50 5000K	
LM Lùmino	-100 93W	-5S	-57 5700K	
	-135 124W			
	-165 155W			
	-200 186W			



COMMERCIAL





MERCURY



The luminaire Mercury is an extremely flexible and functional solution to well illuminate interiors, exteriors and covered spaces.

Provided with a minimalist design and a diffusion optical system, Mercury offers a bright light and high quality, excellent thermal performances and high luminous efficiency contributing to reduce energy consumption and achieve significant savings.

Installation is rapid and simple and the equipment can be provided with luminous flux control systems and motion sensors allowing to regulate the light wherever and whenever needed, according to needs thus allowing further savings.

FEATURES

- IP65 and IK10
- Beam angle 130°
- Luminous efficiency up to 100 lm/W
- Excellent light diffusion and aesthetic qualities
- Excellent thermal performances
- Reduced decrease of the luminous flux (L/ 70) > 60.000 h
- Self-extinguishing degree "V2" and UV resistance
- Available in the models MR12 with 40W/50W and MR15 with 50W/65W
- Ceiling or suspended installation
- Recessed or pendant execution

RECOMMENDED APPLICATIONS

- Covered car parks
- Piers and docks
- Bus stations
- Schools
- Railway stations
- Farms
- Sports facilities
- Logistic sector
- Plants

MERCURY



TECHNICAL CHARACTERISTICS

Product prodotto	MR12-40		MR12-50		MR15-50		MR15-65	
Diffuser Type	White	Trasparent	White	Trasparent	White	Trasparent	White	Trasparent
Luminous flux at 5700K (lm)	3.240	3.920	4.050	4.900	4.050	4.900	5.265	6.370
Consumption (W)	40		50		50		65	
Power Factor (cos Fi)	≥0.9							
Operating voltage (V)	AC100~277							
Numerbers of LEDs	216		252		252		324	
Photometric curves	symmetrical 130°. Transparent diffuser, White diffuser							
CCT (K)	3000 / 4200 / 6000							
Color rendering	>80							
Duration of luminous flux (L70)	> 60.000h							
Operating temperature	-20°C/+45°C							
Protection level	IP65							
Materials	Policarbonato (classe V2 resistente UV)							
Installations	ceiling, suspended							
Dimensions (mm)	1123x103x93				1423x103x93			
Weight (Kg)	3, 2				4			


WARRANTY

➤ 3 year warranty against manufacturing defects



ENERGY SAVINGS

SAVING GENERATED DURING THE PRODUCT SERVICE LIFE [50,000 hours]

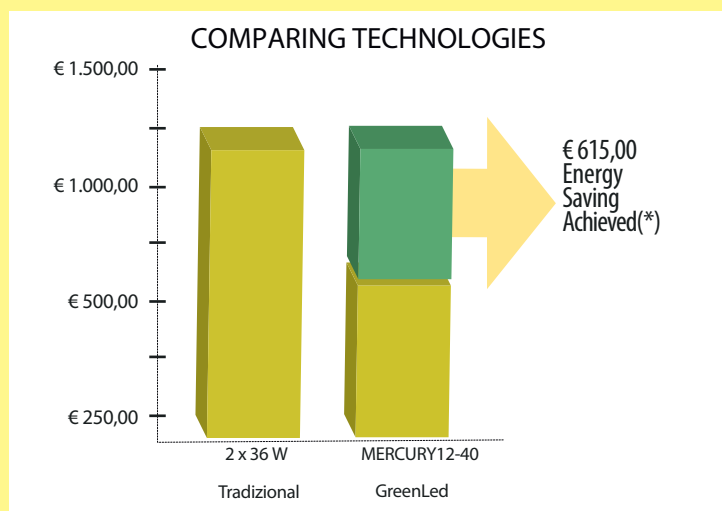

(*) Saving potential compared with a metal halide headlamp operating for 50,000 hours, with a constant cost of electricity equal to 0.18 /kWh.

The calculation is prudential as it does not include maintenance costs and the use of the traditional technology.

CERTIFICATIONS

EN 55015:2013
 EN 61000-3-2:2006 +A1:2009 + A2:2009
 EN 61000-3-3:2013
 EN 60598-2-1:1989
 EN 61547:2009
 EN 60598-1:2008 +A11:2009
 EN 61347-2-13:2006
 EN 61347-1:2008 +A1:2011
 EN 62031:2008
 EN 62493:2010



GEMINI



The LED luminaires GEMINI are the simple, sustainable and high-efficient solution to illuminate indoor and outdoor spaces replacing traditional technologies.

The luminaire has an excellent quality of light to ensure the proper lighting in every environment while significantly reducing energy and maintenance costs.

Gemini are available in three different lengths and in a wide range of power. The luminaires are suitable to replace conventional lighting ensuring maintenance-free installation and a long lifetime.

You can also connect devices with waterproof push-in connectors for end-to-end installation.

FEATURES

- > Modern design
- > Diffuser system
- > High energy efficiency up to 80 lm/W
- > P65
- > High resistance (IK09)
- > Energy saving over 50% than traditional
- > Long lifetime, over 60.000 hours of luminous flux

RECOMMENDED APPLICATIONS

- > Shopping center, Supermarket
- > Transition areas
- > Warehouses
- > Parking garages
- > Airport, Subways

GEMINI



TECHNICAL CHARACTERISTICS

Product	GM06		GM12-20		GM12-36		GM15-25		GM15-42	
Diffuser Type	White	Trasparent	White	Trasparent	White	Trasparent	White	Trasparent	White	Trasparent
Luminous flux at 5700K (lm)	1.785	2.100	1.785	2.100	3.203	3.780	2.205	2.625	3.675	4.410
Consumption (W)	20		20		36		25		42	
Power Factor (cos Fi)	≥0.9									
Operating Voltage (V)	AC100~277									
Numbers of LEDs	60		120		120		150		150	
Photometric curves	symmetrical 170°. Transparent and white diffuser									
CCT (K)	3000 / 4000 / 5700									
Color rendering	>80									
Duration Luminous flux(L70)	> 60.000h									
Operating Temperature	-20°C/+45°C									
Protection Level	IP65									
Materials	Policarbonato (classe V2 resistente UV)									
Installation	ceiling, suspended									
Dimensions (mm)	600x80x56		1200x80x56				1500x80x56			
Weight (Kg)	0,7		1,2				1,5			


WARRANTY

➤ 3 year warranty against manufacturing defects



ENERGY SAVING

ENERGY SAVING GENERATED DURING THE PRODUCT SERVICE LIFE [50,000 hours]

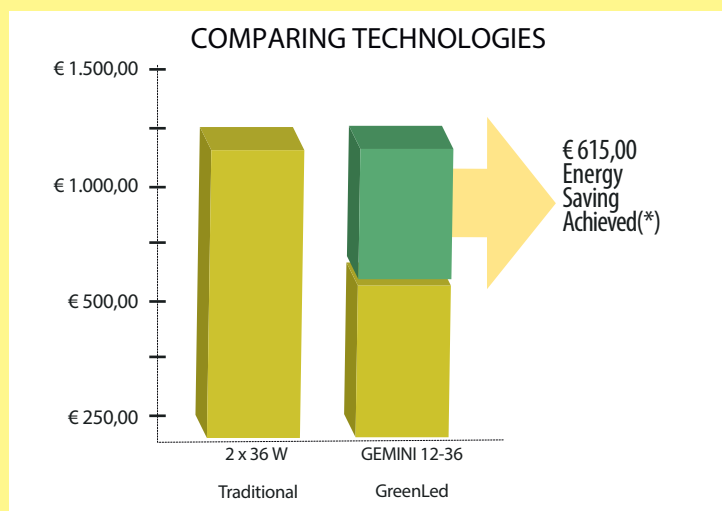

(*) Saving potential compared with a metal halide headlamp operating for 50,000 hours, with a constant cost of electricity equal to 0.18 /kWh. The calculation is prudential as it does not include maintenance costs and the use of the traditional

CERTIFICATIONS

EN 55015:2013
 EN 61000-3-2:2006 +A1:2009 + A2:2009
 EN 61000-3-3:2013
 EN 60598-2-1:1989
 EN 61547:2009
 EN 60598-1:2008 +A11:2009
 EN 61347-2-13:2006
 EN 61347-1:2008 +A1:2011
 EN 62031:2008
 EN 62493:2010



SATURN



The luminaire Saturn is the ideal solution for general lighting purposes of interiors and offers high energy performances while guaranteeing appropriate lighting levels and an excellent color rendering able to improve the visual perception and allowing to enhance the objects in the environments.

Thanks to its elegant look and its easy installation, Saturn is extremely flexible and functional for different applications. This high-efficiency LED solution ensures the maximum energy saving as well as excellent illuminance uniformity everywhere.

Ideal for those customers who want to save energy and create efficient and comfortable environments, the luminaire can be equipped with luminous flux control systems and motion sensors that allow to regulate light according to the needs, while ensuring further savings.

FEATURES

- IP20, versatile system for several applications in closed spaces
- High luminous efficiency (85lm/W)
- Excellent Illuminance Uniformity
- Easy ceiling or suspended installation
- Reduced decrease of the luminous flux (L/ 70)> 60.000 h 60%
- of energy saving

RECOMMENDED APPLICATIONS


- Malls
- Large-scale retails
- Common areas
- Schools
- Logistic sector
- Offices

SATURN



TECHNICAL CHARACTERISTICS

Product Family				
Luminous flux at 5000K (lm)	3.780		4.725	
(www) Consumption (W)	40		50	
Power Factor (cos Fi)	≥0.9			
Operating voltage (V)	A C100~240			
(aaa) Number of LEDs	96	144	192	240
(dd) Photometric curves	05: Symmetrical 120°			
(mmmm) CCT (K)	3000/4000/6000			
Color rendering	>80			
Luminous flux duration (L70)	60.000h			
Working temperature	-20°C/+45°C			
Protection level	IP20			
Material	Aluminium - PMMA			
Standard Cable Length (ml)	2			
(h) Installation type	3: Ceiling 4: Suspended			
Sizes (mm)	614x160x53,2	894x160x53,2	1170x160x53,2	1446x160x53,2
Weight (Kg)	1,7	2,4	3,6	4,6

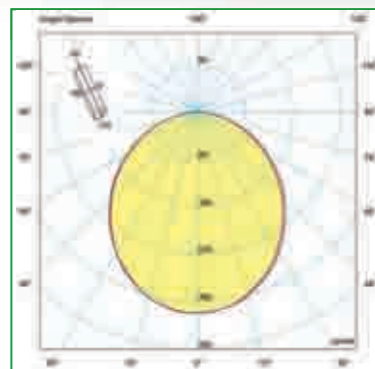

Photometric symmetrical curve 120°


WARRANTY

> 3 year warranty against manufacturing defects



ENERGY SAVINGS

SAVING GENERATED DURING THE PRODUCT SERVICE LIFE [50,000 hours]

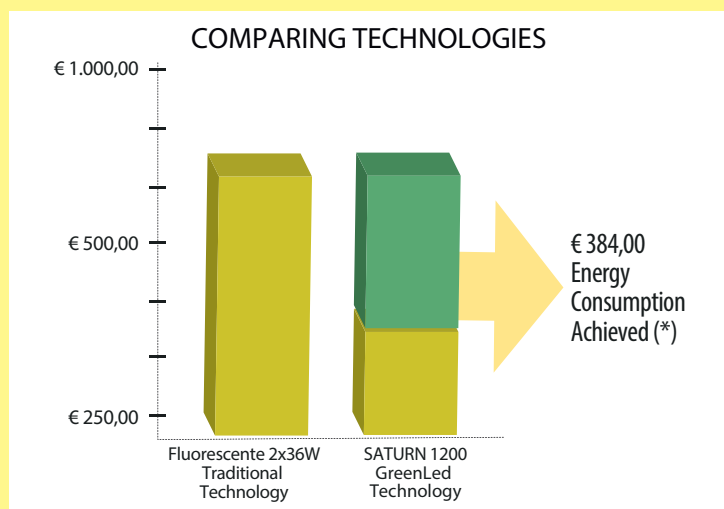


(*) Saving potential compared with fluorescent lamp 2x36W operating for 50,000 hours, with a constant cost of electricity equal to 0.18 /kWh. The calculation is prudential as it does not include maintenance costs and the wear of the traditional technology.

CERTIFICATIONS

EN 62493:2010
 EN 55015:2006 + A1:2007 + A2:2009
 EN 61000-3-2:2006 + A1:2009 + A2:2009
 EN 61000-3-3:2008
 EN 61547:2009



iPANEL

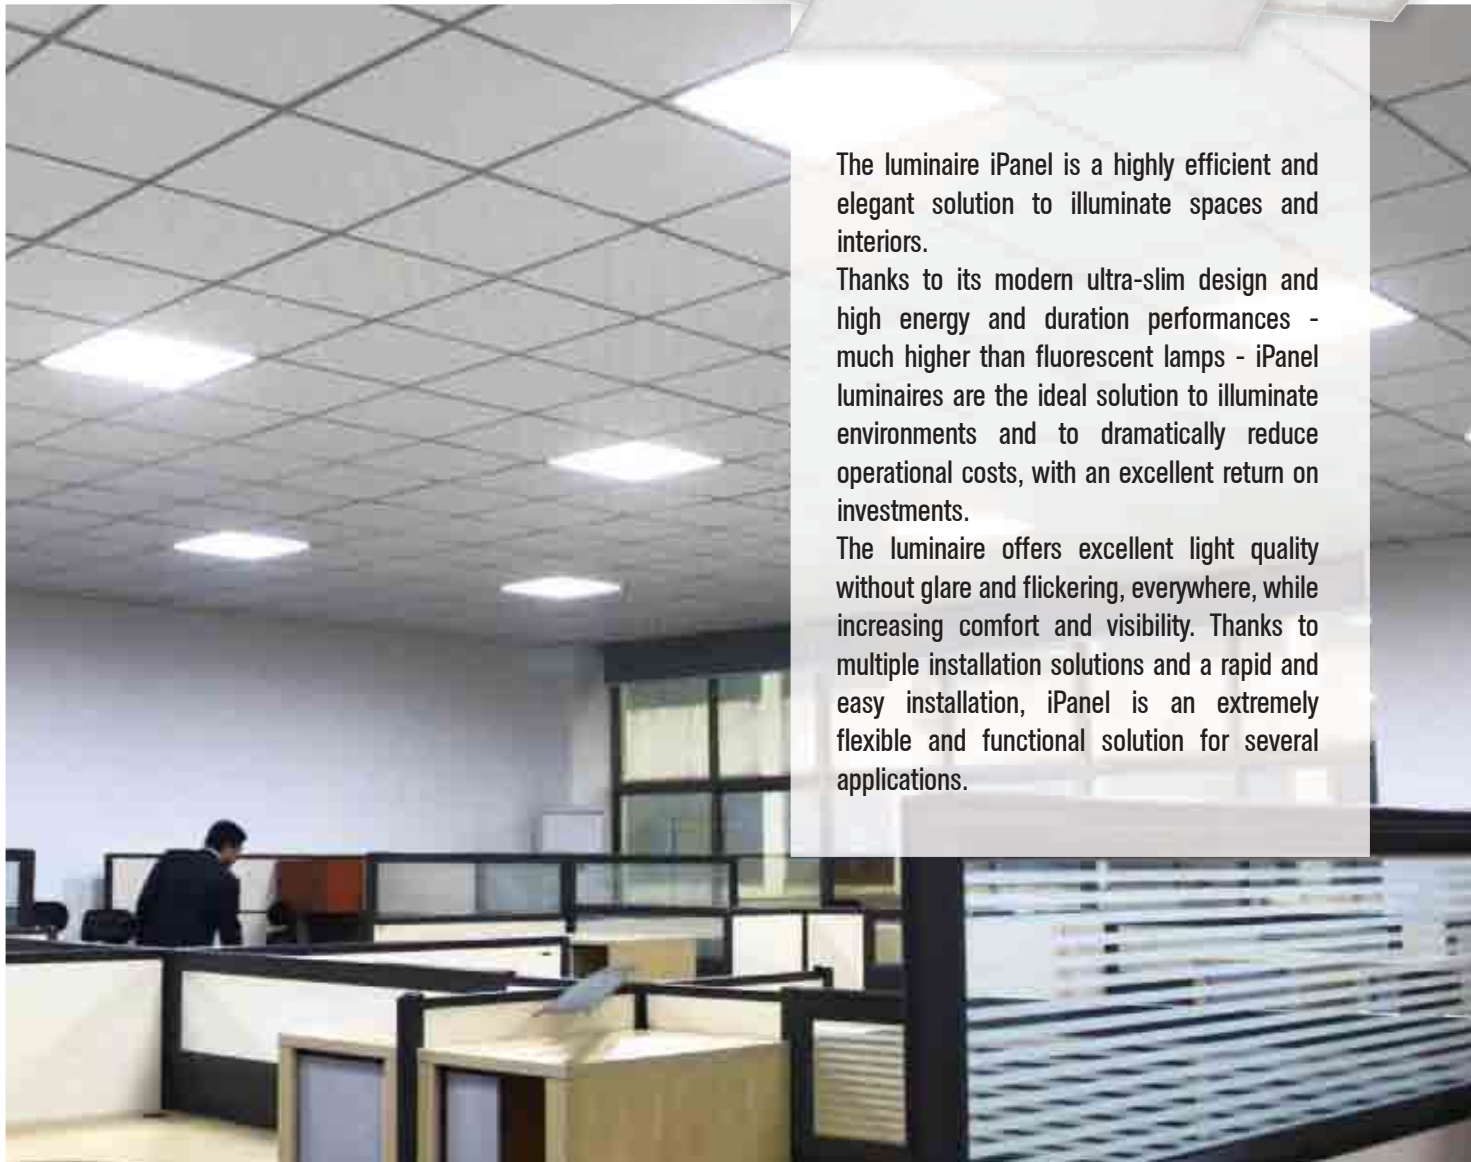

The luminaire iPanel is a highly efficient and elegant solution to illuminate spaces and interiors.

Thanks to its modern ultra-slim design and high energy and duration performances - much higher than fluorescent lamps - iPanel luminaires are the ideal solution to illuminate environments and to dramatically reduce operational costs, with an excellent return on investments.

The luminaire offers excellent light quality without glare and flickering, everywhere, while increasing comfort and visibility. Thanks to multiple installation solutions and a rapid and easy installation, iPanel is an extremely flexible and functional solution for several applications.

FEATURES

- Technology, design and high quality
- Ultra-slim laser light guide panel
- High luminous efficiency, higher than 70 lm/W
- Protection degree IP52
- Glare control for BAP (VDU writing)
L < 200 cd/sqm A 60°
- Energy saving higher than 40% compared to fluorescent lamps T5
- Eco-friendly materials
- Solutions for multiple installation solutions
(wall, ceiling, pendant, false ceiling, etc.)

RECOMMENDED APPLICATIONS


- Malls
- Large-scale retails
- Common areas
- Schools
- Logistic sector
- Offices

iPANEL



TECHNICAL CHARACTERISTICS

Product code	PN03	PN06	PN12
Luminous flux at 4000K (lm)	1.700	3.500	3.500
(www) Consumption (W)	22	42	42
Power Factor (cos FI)	≥0.93		
Operating voltage (V)	AC220~240		
(aaa) Number of LEDs	560		
(dd) Photometric curves	05: Symmetrical 112°		
(mmm) CCT (K)	3000/4000/5000		
Color rendering	>80		
Luminous flux duration (L70)	60.000h		
Working temperature	-20°C/+40°C		
Protection level	IP52		
Material	Aluminium Frame – PMMA Screen		
Standard Cable Length (ml)	2		
(h) Installation type	3: Ceiling - 4: Suspended - 5: Recessed		
Sizes (mm)	600x300x10,4	600x600x10,4	1200x300x10,4
Weight (Kg)	2	4	4

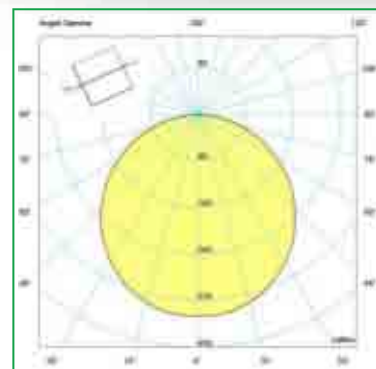

Symmetrical photometric curve 112°


WARRANTY

> 3 year warranty against manufacturing defects



ENERGY SAVINGS

SAVING GENERATED DURING THE PRODUCT SERVICE LIFE [50,000 hours]

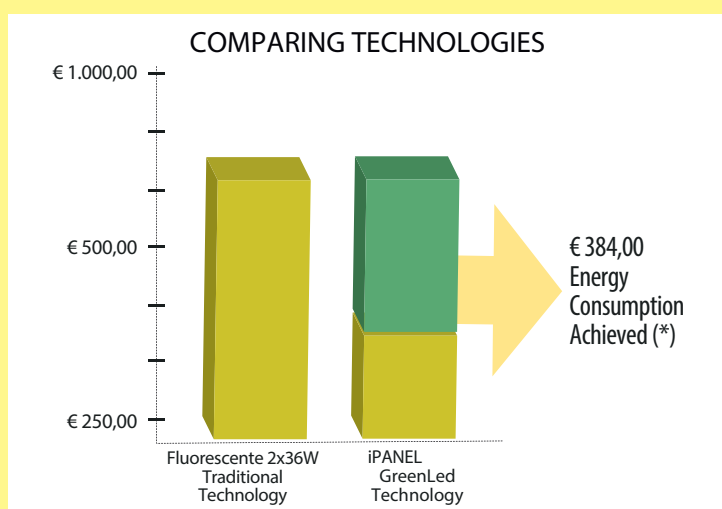

(*) Saving potential compared with fluorescent lamp 4x18W operating for 50,000 hours, with a constant cost of electricity equal to 0.18 /kWh. The calculation is prudent as it does not include maintenance costs and the wear of the traditional technology.

CERTIFICATIONS

EN 55015:2013
 EN 61547:2209
 EN 61000-3-2:2006 + A1:2009 + A2:2009
 EN 61000-3-3:2013
 EN 60598-2-1:1989
 EN 60598-1:2008 + A11:2009
 EN 61347-2-13:2006
 EN 61347-1:2008 + A1:2011
 EN 62031:2008
 EN 62493:2010



Commercial & Office

ACCESSORIES

MERCURY

Suspended mounting kit
Cod. A-000299

GEMINI

Suspended mounting kit
Cod. A-000663

SATURN

Suspended mounting kit
Cod. A-000735

iPANEL | PN03

Box for ceiling mounting
Wall mounting kit
Suspended mounting kit
Recessed mounting kit
Ceiling mounting kit

Cod. A-000720
Cod. A-000721
Cod. A-000722
Cod. A-000723
Cod. A-000724

iPANEL | PN06

Box for ceiling mounting
Wall mounting kit
Suspended mounting kit
Recessed mounting kit
Ceiling mounting kit

Cod. A-000725
Cod. A-000726
Cod. A-000727
Cod. A-000728
Cod. A-000729

iPANEL | PN12

Box for ceiling mounting
Wall mounting kit
Suspended mounting kit
Recessed mounting kit
Ceiling mounting kit

Cod. A-000730
Cod. A-000731
Cod. A-000732
Cod. A-000733
Cod. A-000734

iPANEL DRIVER

Driver ALVIT ALT6024 24V,
2.500 mA - PFC ATTIVO


Cod. A-000501

Driver MEANWELL LPV6024
24V 2.500 mA


Cod. A-000750

PHOTOMETRIC DATA


Mercury

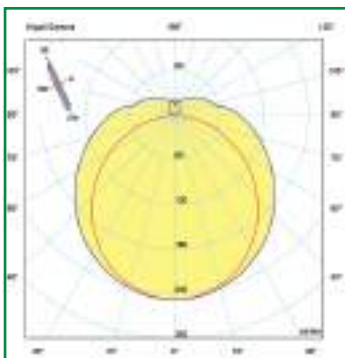


Gemini

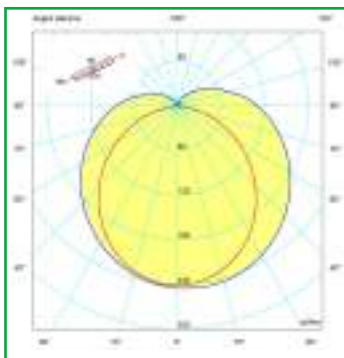

Saturn

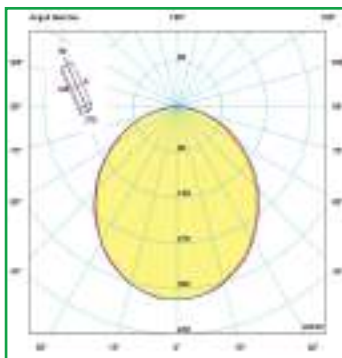

iPANEL

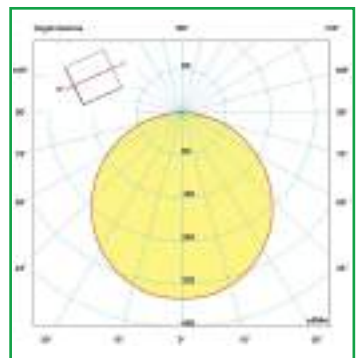

ORDER INFORMATION

The table below provides guidelines for encoding item numbers when ordering fixtures. Select a fixture power, optic and CCT, using character codes in bold when ordering. In case of optional, select the type.

SERIES		POWER		OPTICAL	CCT		OPTIONAL
MR12	Mercury 1200mm	-40	40W	-11 Trasparent Diffuser -10 White Diffuser	-30 3000K -42 4200K -60 6000K	-R dimmable 0-10V -X emergency -M occupancy sensors	
		-50	50W				
MR15	Mercury 1500mm	-50	50W				
		-65	65W				
GM06 Gemini 600mm		-20	20W	-11 Trasparent Diffuser -10 White Diffuser	-30 3000K -40 4000K -57 5700K	-W1 waterproof connector -W2 two WP connector	
GM12	Gemini 1200mm	-20	20W				
		-36	36W				
GM15	Gemini 1500mm	-25	25W				
		-42	42W				
ST	Saturn	-40	40W	-10 White Diffuser	-30 3000K -40 4000K -57 5700K		
		-50	50W				
PN03 iPanel 300x600mm		-22	22W	-12 SYMMETRICAL 112°	-30 3000K -40 4000K -50 5000K		
PN06	iPanel 600x600mm	-42	42W				
PN12	iPanel 300x1200mm						

WARRANTY FOR LAMPS

GREENLED INDUSTRY S.P.A.

This limited warranty is provided by the company **GREENLED Industry SpA** (hereafter referred to as "GREENLED" or "Seller") to the original Buyer of the LED luminaire defined in the invoice issued by the Seller in case of a purchase of the Product.

GREENLED makes sure that the Product, if delivered new and in its original packaging, will not have any material and manufacturing defect for a period of THREE (3) years for series MERCURY, GEMINI, SATURN, iPANEL; a period of SIX (6) years for series BBLOCK, SPARTA, LUMINO, URBAN RELAMPING KIT; a period of TEN (10) years for series VOLTA, MATTEUCCI, DA VINCI. The period starts from the purchase date.

The Product is to be considered as defective when:

-The luminous flux is reduced by less than 70% compared to the one declared on the product label during the warranty period starting from the date in the invoice -and/or

-Is not free from design, material and manufacturing defects.

It is the Seller's responsibility and discretion to establish if the Product is defective based on the Product general performance.

In case of absence of light from one of the LED units, this will not represent a defect of the Product if the number of not working components results in a decrease in the nominal light flux equal at least to 10% of the one stated.

This warranty is not valid if the Product is used for purposes other than those for which it was made.

This warranty is applied to professional LED lamps made by **GREENLED** sold in Europe, Middle East and Africa starting from June 2013.

Applicability of this warranty

- For a year of warranty, we mean a year of operation of 8,760 hours and a room temperature of 25 °C .
- The Buyer will be entitled to ask for warranty conditions other than those reported in the previous point and they will be granted after assessing the specific application conditions.
- For the purposes of the application of the warranty, the Buyer could not refer to other information or documents.

This warranty covers exclusively the product used according to the following use conditions that must be fulfilled simultaneously for the purposes of the warranty:

- the Product operating temperature is compliant with the one in the technical data of each product;
- the relative humidity in the plant is not higher than the IP classification of the Product;
- Products are not subject to a value higher than 50,000 cycles (power on/off);
- Products must work within a voltage range of 230 V +/- 10%.

This summary includes but is not limited to the terms and conditions of the warranty.

- This warranty is valid only for the Products sold inside the EMEA area (Europe, Middle East and Africa). In other countries, different terms and conditions may be applied.
- This warranty is valid only if the Products have been sold directly by a Sales Department of **GREENLED**.
- The customer must have the document of delivery of the Product.
- This warranty is valid only if the Products have been correctly installed and used according to the instructions of the manufacturer.
- The operating modes must be registered and available for any inspection by the **GREENLED** representative.
- Upon request, the **GREENLED** representatives must have access to the defective Product, system or application for a non-compliance check.
- The manufacturing costs for installing and uninstalling the Products are not covered by this warranty.

The warranty will be valid from the delivery date and/or the production lot reported on each Product and within the six months following the delivery.

In compliance with the provisions established in the Terms and Conditions of the warranty attached to this document, the Buyer receives the warranty for the applicable period.

WARRANTY TERMS AND CONDITIONS

1. Limited Warranty

The warranty, as described in this document, will be applied exclusively to the luminaires branded **GREENLED** sold by **GREENLED** in Europe, Middle East and Africa, (hereafter the "Product"). This warranty is applicable exclusively to the party buying the product directly from **GREENLED** (hereafter the: 'Buyer').

GREENLED makes sure that each Product is free from material and manufacturing defects.

This warranty will be valid for the period mentioned in the warranty applicable to the products as reported in the sales agreement. In case of Product failure according to this warranty, **GREENLED** will, in its sole discretion, replace or repair the defective product in compliance with the terms and conditions of the applicable limited warranty as established below.

2. Terms and conditions

- The **GREENLED** warranty is applied exclusively to the Buyer. If a Product covered by this warranty is returned by the Buyer in compliance with what provided and established in the section 3 and within the applicable warranty term and if, after examination, **GREENLED** will define that such a Product was not compliant with this warranty, at its sole discretion, **GREENLED** will repair or replace the Product or the defective part or will reimburse the sales price to the Buyer of the Product. Repairing or replacing the Product or the defective part will not include any removal or reinstallation activity, costs or charges, including but not limited to any costs and charges of expedition or manufacturing of the Product. In order to repair or replace the Product, as provided by this warranty, **GREENLED** reserves the right to use new, reconditioned, refurbished, repaired or transformed products. These products and components will be treated, in terms of functions and performances, as original products and components, according to what established by **GREENLED** in its sole discretion and covered by the warranty for the whole original warranty period.

- If **GREENLED** decides to replace the Product, but is not able to do it because it came out of production or is no longer available, **GREENLED** may reimburse the Buyer or replace the Product with a similar one (that could present slight differences in the design and specifications of the Product).
 - No agent, distributor or dealer is authorized to change, modify or extend the terms of the limited warranty on behalf of **GREENLED**, in any matter.
 - This limited warranty is applied exclusively if the Product has been correctly cabled, installed and used within the electrical values, the operating range and environmental conditions defined in the specifications, in the applicable guidelines, in the IEC standards or in any other document provided with the Product. If a Product is defective or non working based on the Product specifications, the Buyer must communicate it to **GREENLED** by writing.
 - **GREENLED** will facilitate the technical solution of the problems. The products (or Product components) from third parties sold by **GREENLED** are not covered by this warranty, without prejudice to what established in section 5.
 - This warranty does not apply to defects or non compliance resulting from any cause of force majeure or any other abuse, misuse, abnormal use or use violating any other standard, code or applicable use instructions including, but not limited to those contained in the safety standards, or the most recent relevant and/or electrical standards for the specific country/countries.
 - This warranty will be invalid if the Product is repaired or changed, by any person not duly authorized by writing by **GREENLED**.
- GREENLED** reserves the right to definitively decide about the validity of any warranty claim.
- Upon request by **GREENLED**, non-compliant or defective products will become property of **GREENLED** as soon as they are replaced.

3. Calls on warranty

All the warranty periods mentioned are subject to the access to the defective Product or system in order to check for the non compliance by a representative of **GREENLED**. Calls on warranty must be reported and sent to **GREENLED** (Strada dello Stabilimento n.1 Nera Montoro – Nami) within 30 days of detecting the defect, by specifying the following information (additional information can be requested):

- Damaged products; for system warranties, specify also other components;
- Installation date and invoice date;
- Detailed description of the problem and number;
- Application, hours of operation and commutation cycles;
- If a call on a warranty is not justified, **GREENLED** may charge the Buyer with the costs for the Products returned that are not defective or not compliant, together with the related management, check and transportation costs.

4. Lack of implicit warranties or other warranties

- This limited warranty and the solutions included therein are the only warranties offered by **GREENLED** with relation to the Products, to replace and exclude any other warranty, whether explicit or implicit, to the extent permitted by law, including without limitation warranties of merchantability or fitness for a particular purpose: without prejudice to the case of fraud or gross negligence by **GREENLED**, all other warranties are therefore not applicable.
- These terms and conditions establish the maximum liability of **GREENLED**, its obligations towards the Buyer as well as the only remedy available to the Buyer in case of defective or non compliant Products provided by **GREENLED**, remedy to be meant as including and replacing any other form of warranty or liability, also by way of derogation from law standards, to the extent permitted by law, and excludes any other liability (whether contractual or non contractual) of **GREENLED** due to defects, non compliance or lack of quality, even if **GREENLED** has been informed or is aware of such defects.

5. Limitations and conditions

- This is a limited warranty and excludes, among other items, the installation, any access means to products (scaffolding, hoisting equipment, etc.), and special damages, whether incidental and consequential (such as the loss of economic profits/loss of profit, damage to property or other extended costs previously not mentioned), and is further defined by the limitations and conditions provided by the warranty and included in the terms and conditions.
- Upon request, the **GREENLED** representatives must access the defective Product, system or application in order to check any lack of compliance.
- **GREENLED** cannot be held liable for the conditions of electricity, including power picks, over/under-voltage and systems of control of the ripple current that go beyond the limits specified of the products and beyond those defined by the specific power standards (i.e. compliance of the standard CEI EN 50160).
- With relation to the products sold to the Buyer by **GREENLED** that are not branded **GREENLED**, **GREENLED** does not offer any type of warranties, whether explicit or implicit, including without limitation any warranties of merchantability or fitness to a specific purpose, but will put at the Buyer's disposal upon request, exclusively to the maximum extent allowed by law and relevant agreements, the manufacturer's warranties of the Product.
- In no case, **GREENLED** shall be deemed as liable for any damages, whether they are accidental, compensatory, consequential, indirect, special or any other type of damage. The overall responsibility of **GREENLED** for a defective Product could not exceed, in any case, the amount paid by the Buyer for the above-mentioned defective Product.
- **GREENLED** reserves the right to modify this warranty over the time. Any change of this warranty shall be applied to all orders concluded with **GREENLED** starting from the date of validity of the modified warranty.

[illegible]

Powered By
TerniEnergia



GREENLED Industry S.p.A.

Strada dello Stabilimento, n. 1 05035 - Nera Montoro – Narni (TR)

C.F. e P.I.: 01493180556 - Phone: +39 0744 758200 - Fax: + 39 0744 758205

www.greenledindustry.com